

UP'N DOWN FIELD CONVERSION KIT

FROGGER and ZAXXON

Bally

MIDWAY MFG. CO.

10601 W. Belmont Avenue
Franklin Park, Illinois 60131
U.S.A.



Phone: (312) 451-9200 Cable Address: MIDCO Telex No.: 72-1596

WARNING

THIS GAME MUST BE GROUNDED. FAILURE TO DO SO MAY RESULT IN DESTRUCTION TO ELECTRONIC COMPONENTS.

WARNING: This equipment generates, uses, and can radiate radio frequency energy and if not used in accordance with the instructions manual, may cause interference to radio communications. It has been tested and found to comply with the limits for a CLASS A computing device pursuant to SUBPART J of PART 15 of FCC RULES, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operation of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

ELECTRICAL BULLETIN: FOR ALL APPARATUS COVERED BY THE CANADIAN STANDARDS ASSOCIATION (CSA) STANDARD C22.2 NO. 1, WHICH EMPLOYS A SUPPLY CORD TERMINATED WITH A POLARIZED 2-PRONG ATTACHMENT PLUG.

CAUTION: TO PREVENT ELECTRIC SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

ATTENTION: POUR PREVENIR CHOCS ELECTRIQUES NE PAS UTILISER CETTE FICHE POLARISEE AVEC UN PROLONGATEUR. UNE PRISE DE COURANT OU UNE AUTRE SORTIE DE COURANT, SAUF SI LES LAMES PEUVENT ETRE INSEREES A FOND SANS EN LAISSER AUCUNE PARTIE A DECOUVERT.

Bally MIDWAYTM

Invites You To Use

**OUR TOLL FREE NUMBERS FOR
SERVICE INFORMATION CONCERNING THIS GAME, OR ANY
OTHER BALLY MIDWAY GAME YOU NOW HAVE ON LOCATION.**

**CALL US FOR PROMPT, COURTEOUS
ANSWERS TO YOUR PROBLEMS.**

VIDEO → Continental U.S. 1-800-323-7182

PINBALL → Continental U.S. 1-800-323-3555

Bally MIDWAYTM

10601 West Belmont Avenue, Franklin Park, Illinois, 60131

phone (312) 451-9200

© COPYRIGHT MCMLXXXIV BY BALLY MIDWAY MFG. CO.

ALL RIGHTS RESERVED

NO PART OF THIS PUBLICATION MAY BE REPRODUCED BY ANY MECHANICAL, PHOTOGRAPHIC, OR ELECTRONIC PROCESS, OR IN THE FORM OF A PHONOGRAPHIC RECORDING, NOR MAY IT BE TRANSMITTED, OR OTHERWISE COPIED FOR PUBLIC OR PRIVATE USE, WITHOUT PERMISSION FROM THE PUBLISHER. THIS MANUAL IS FOR SERVICE USE ONLY, AND NOT FOR GENERAL DISTRIBUTION. FOR PERMISSION REQUESTS, WRITE: BALLY MIDWAY MFG. CO., 10601 W. BELMONT AVE., FRANKLIN PARK, IL 60131

Printed in U.S.A.

UP'N DOWN
FIELD CONVERSION KITS

GENERAL:

The basic purpose of this instruction sheet is to give you some simple guide lines for converting your ZAXXON and FROGGER games to UP'N DOWN games.


Check the contents of your Conversion Kit against it's packing slip to be sure you have all the required parts before beginning.

Turn your game OFF, unplug it from it's power source, and open all its access doors.

NOTE: Refer to the attached "BEFORE" and "AFTER" drawings to help you identify the various parts talked about in this Instruction Sheet.

ZAXXON TO UP'N DOWN CONVERSION

1. Disconnect and remove the ZAXXON game boards and set them aside.
2. Relocate the games Power Supply as shown, observing the critical measurements pointed out in the **AFTER** drawing.
3. Relocate the game's Self-Test Switch Assembly as shown in the **AFTER** drawing.
4. Install the NEW game board as shown in the **AFTER** drawing and connect it to it's cabling.
5. Remove the screws from the Header Retaining Bracket and replace the Header.
6. Replace any other remaining miscellaneous items with the NEW ones provided in your Conversion Kit.
7. Secure your games access doors, reconnect it to it's power source, turn it ON, and check to see if your picture appears upside down and reversed.
 - A. If it is O.K., run a Self-Test and go on to Step 8 below.
 - B. If the picture is upside down and reversed, (LEFT is RIGHT and RIGHT is LEFT), go to the MONITOR MODIFICATIONS SECTION where it is explained how to correct this condition.
8. When through completing a positive Self-Test (everything checks good), your game is ready for use.


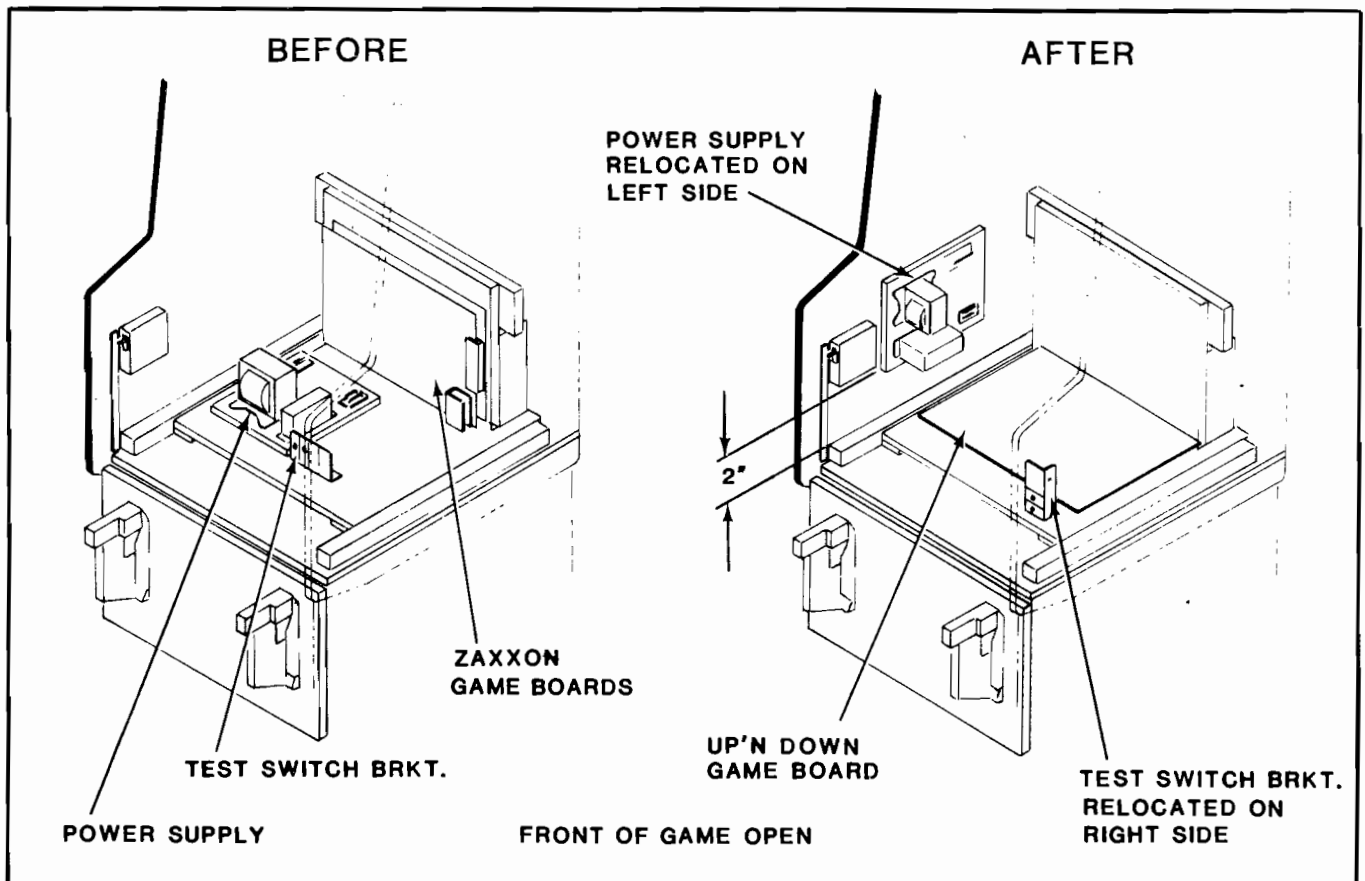


F R O G G E R T O U P ' N D O W N C O N V E R S I O N

1. Disconnect and remove the FROGGER game boards and set them aside.

NOTE: You may also want to remove the games Coin Door and Frame Assembly at this point to give you more room to work on the next several Steps.

2. Disconnect and remove the game's Control Panel (held in place by bolts with wing-nuts from underneath).
3. Remove the plywood panel the FROGGER game boards were mounted on.
4. Relocate the games Power Supply as shown, observing the critical measurements pointed out in the **AFTER** drawing.
5. Install the NEW game board as shown in the **AFTER** drawing and connect it to it's cabling.
6. Disconnect and replace the 4-way Joystick Assembly on the Control Panel with the NEW 8-way Joystick Assembly provided in your Conversion Kit. Reconnect the cabling and re-install the Control Panel.
7. Remove the screws from the Speaker and Header Retaining Board as shown (it will drop down) and replace the Header.
8. Replace any other remaining miscellaneous items with the NEW ones provided in your Conversion Kit.
9. Reinstall the game's Coin Door and Frame Assembly if you removed it previously.
10. Secure your games access doors, reconnect it to it's power source, turn it ON, and check to see if your picture appears upside down and reversed.
 - A. If it is O.K., run a Self-Test and go on to Step 11 below.
 - B. If the picture is upside down and reversed, (LEFT is RIGHT and RIGHT is LEFT), go to the MONITOR MODIFICATIONS SECTION where it is explained how to correct this condition.
11. When through completing a positive Self-Test (everything checks good), your game is ready for use.

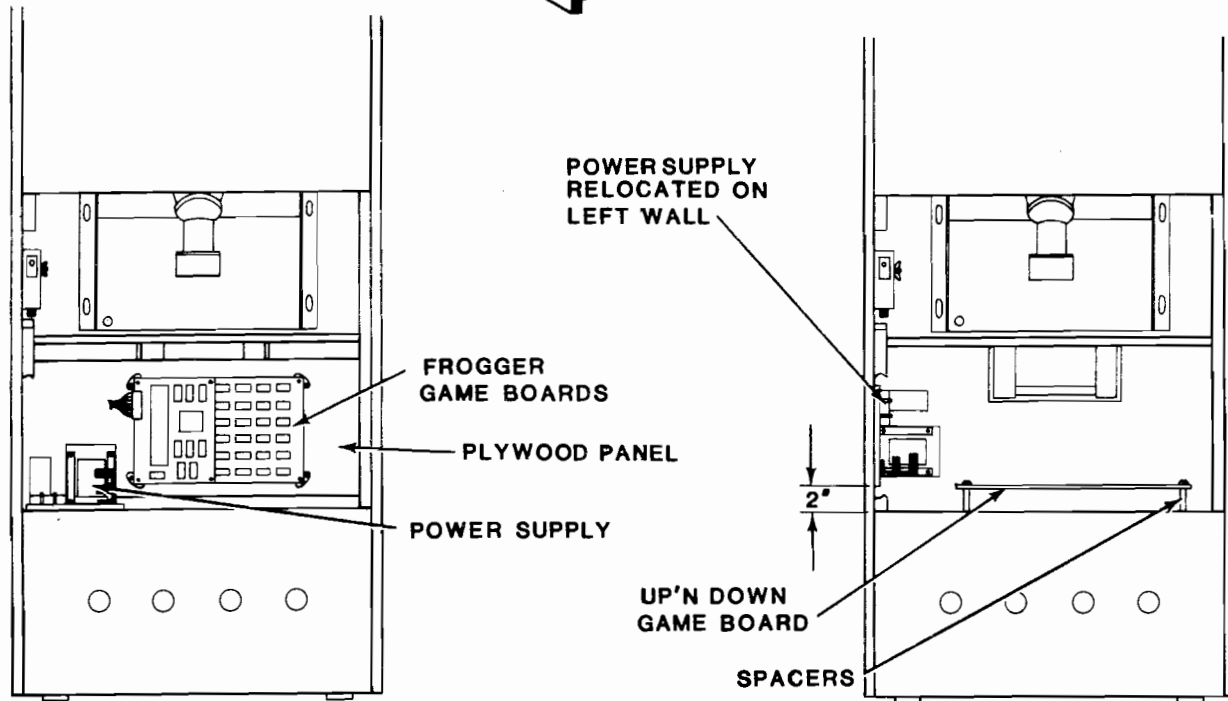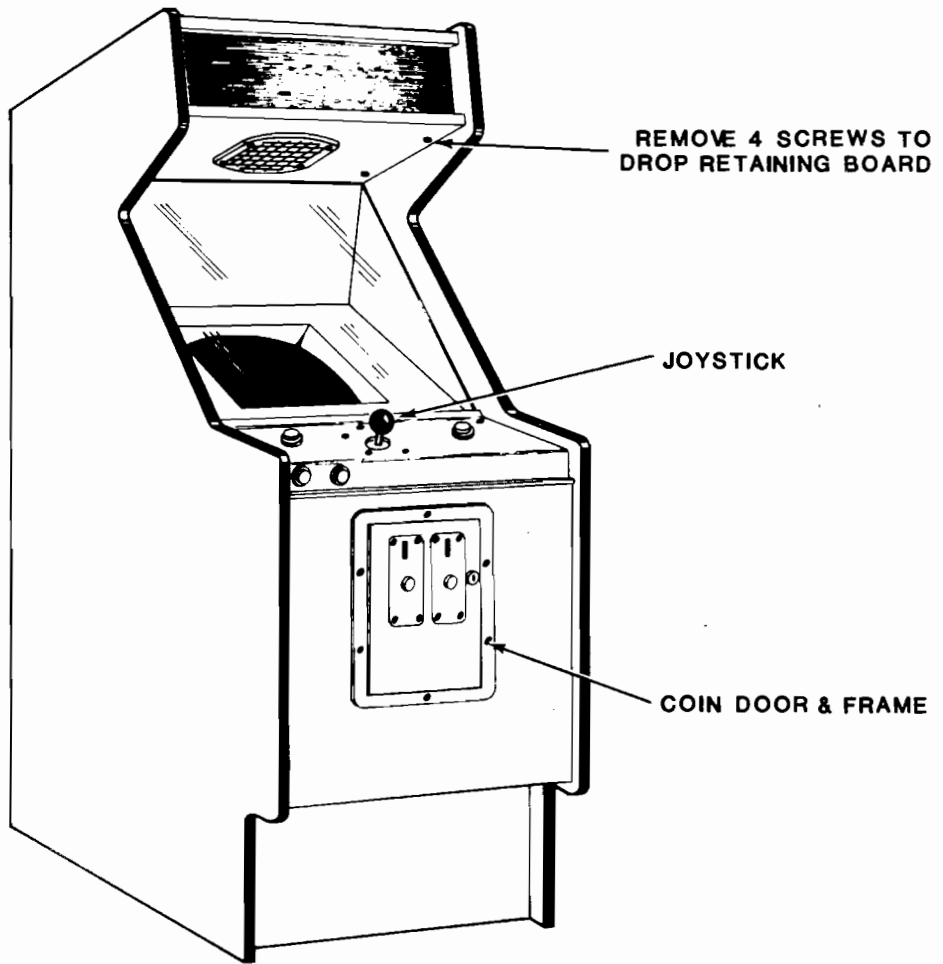

BEFORE

AFTER

MONITOR MODIFICATIONS SECTION

If the picture in your modified game is upside down and reversed (LEFT is RIGHT and RIGHT is LEFT); depending on the monitor contained in your game; this condition can be fixed in one of the following ways.

TURN THE POWER TO YOUR GAME OFF!!

MONITOR: ELECTROHOME - YOKE WIRES SOLDERED IN PLACE AT BOTH ENDS. REFER TO DRAWING #1

By the picture tube, cut the 4 yoke wires (RED, WHITE, GRAY, and BROWN). **BE SURE** to leave enough room to strip them and splice them back together as shown in Drawing #1.

MONITOR: ELECTROHOME - YOKE WIRES PLUGGED INTO THE MONITOR'S P.C. BOARD. REFER TO DRAWING #2

You will see the yoke wires (BROWN, WHITE, GRAY, and RED) plugged into the monitor's P.C. Board at it's back right-hand corner, just below the flyback. See Drawing #2 Figure A.


Unplug them and reconnect them as shown in Drawing #2 Figure B.

MONITOR: WELLS GARDNER - YOKE WIRES PLUGGED DIRECTLY INTO THE YOKE. REFER TO DRAWING #3

You will see the yoke wires (YELLOW, BLUE, RED, and GREEN) plugged into the monitor's yoke. Unplug them and switch the pairs indicated in Drawing #3.


UPON COMPLETION OF MODIFICATIONS:

Return to the procedure you left to come to this section, at the point you left it, and complete that procedure.

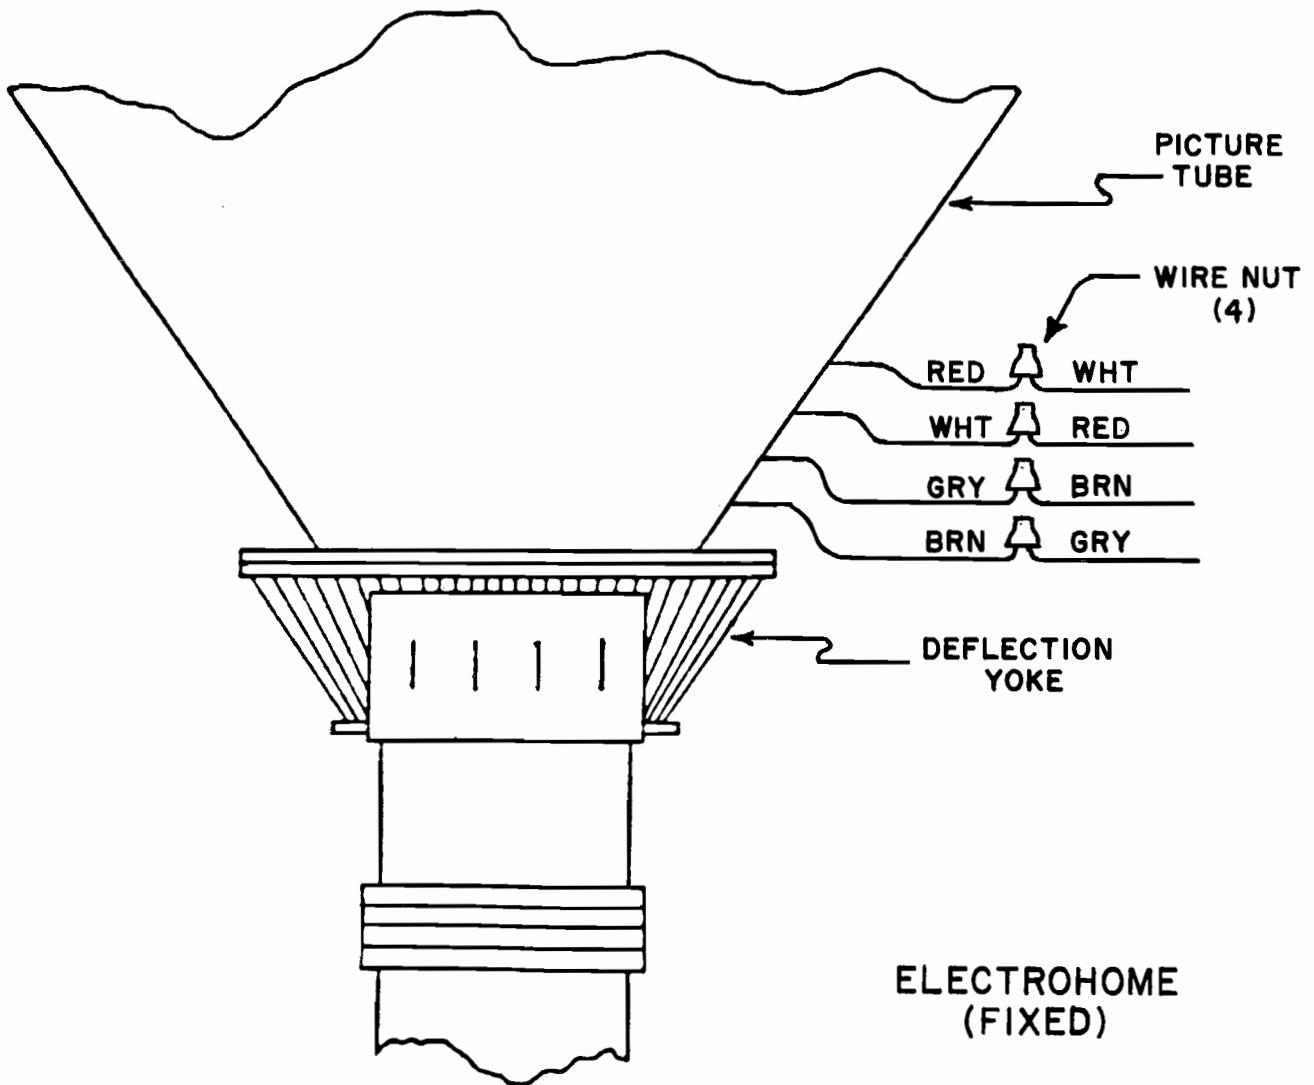


DRAWING 1

FIGURE A

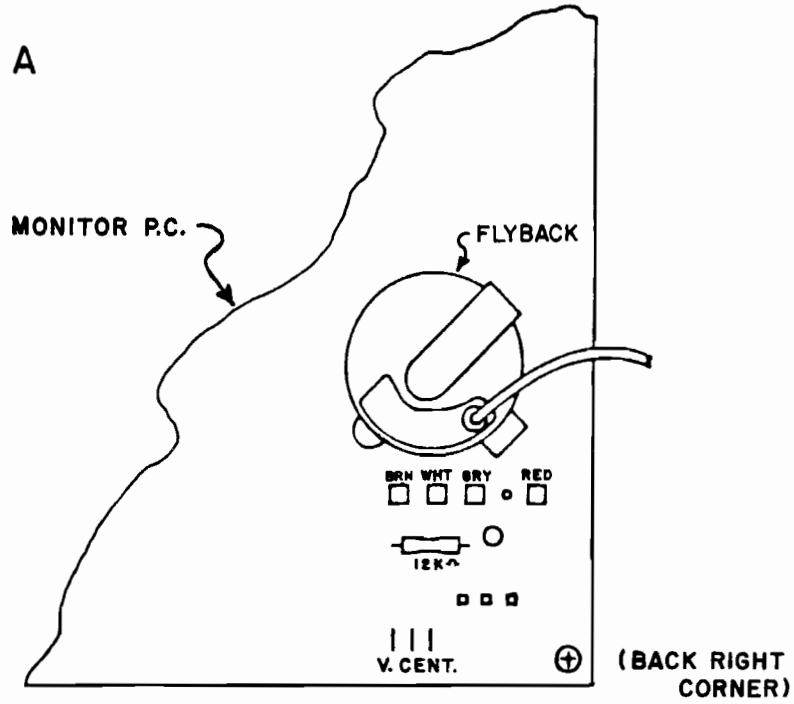


ELECTROHOME
(FIXED)

FIGURE B

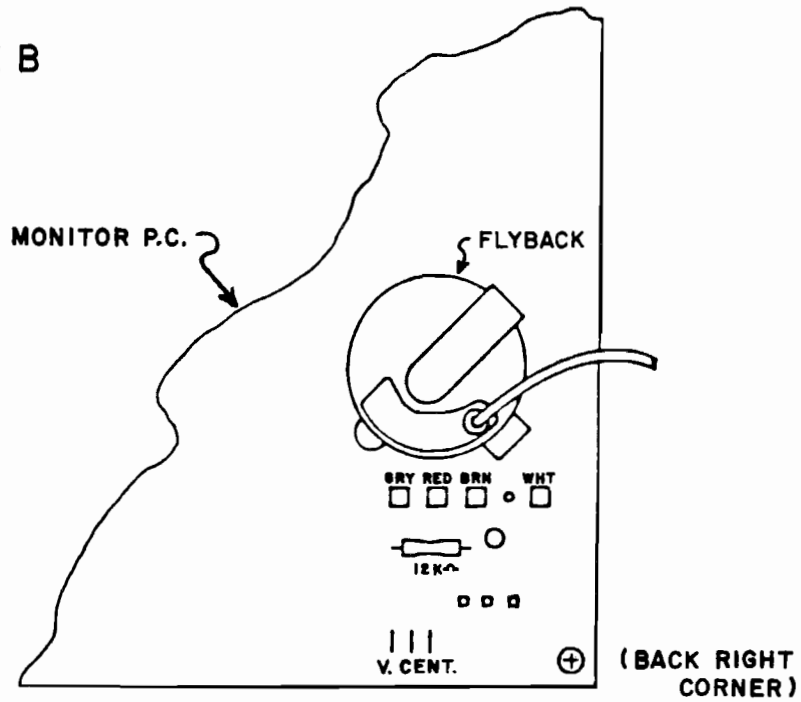


ELECTROHOME
(FIXED)

DRAWING 2

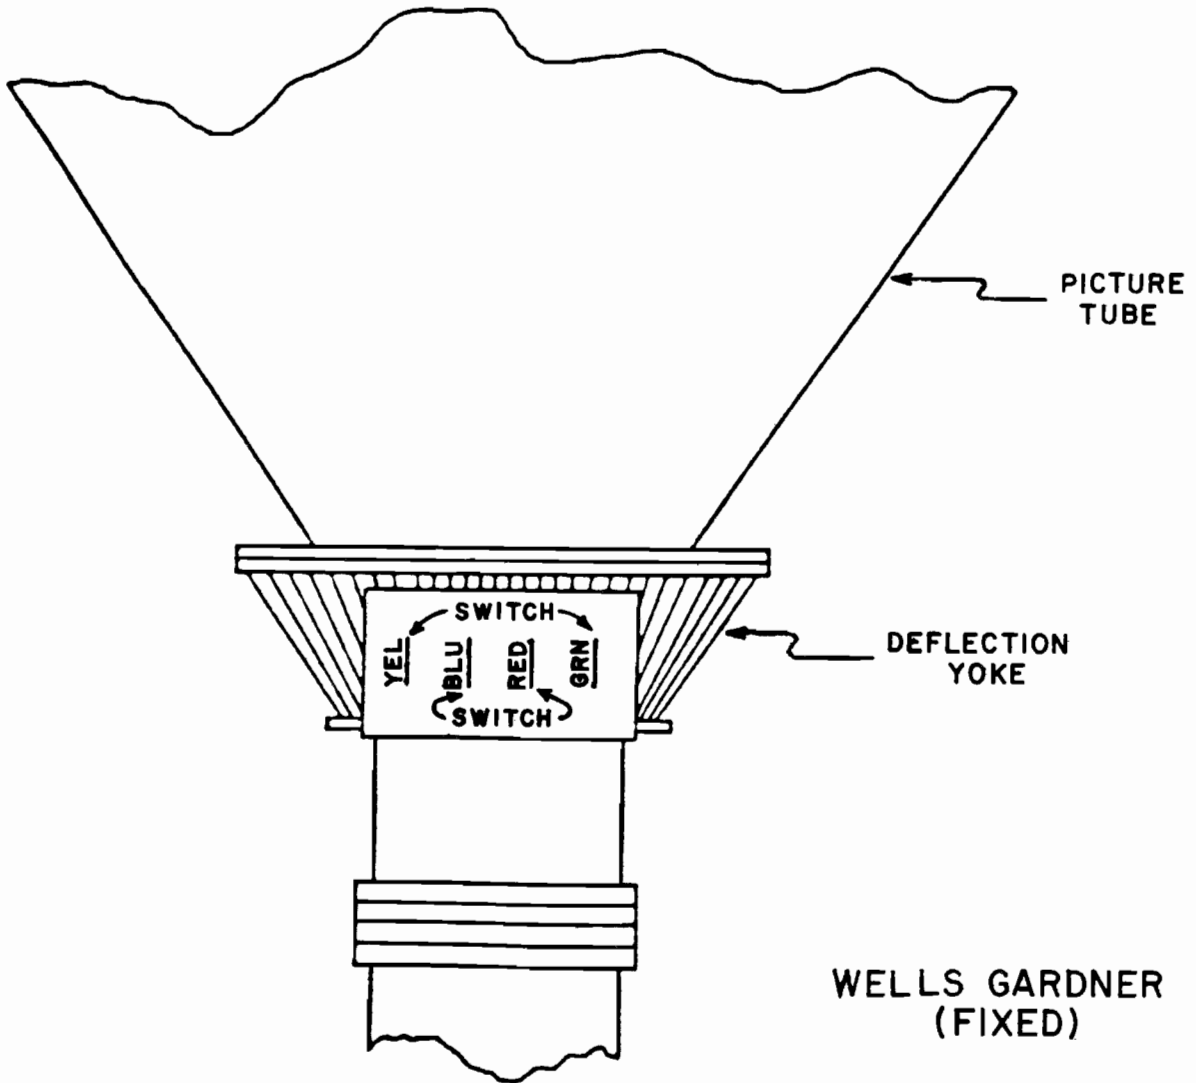

WELLS GARDNER
(FIXED)


DRAWING 3

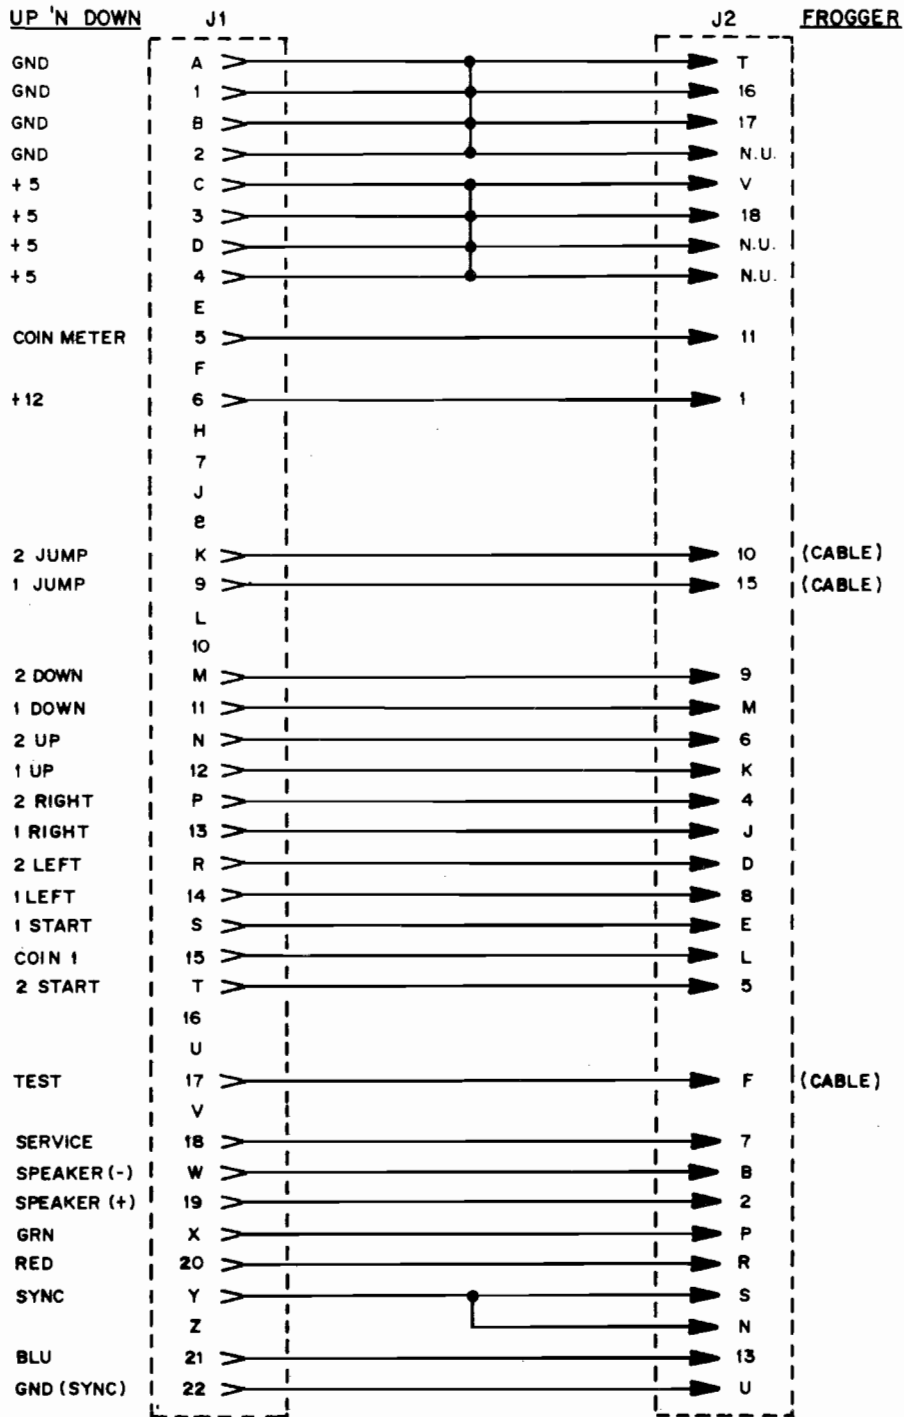

REVISIONS	

PROJECT ENG: J. SZERSZEN		USED ON UP 'N DOWN		Baby / MIDWAY MFG. CO. FRANKLIN PK ILL
DO NOT SCALE DWG		SCALE FULL	NO. REQ'D 1 PER	
DIM TOLERANCES UNLESS SPECIFIED		UP 'N DOWN / FROGGER INTERFACE P.C. SCHEMATIC DWG A080-91722-BA63		PART NO. M051-00A63 - B011
DATE 3/27/84				

111

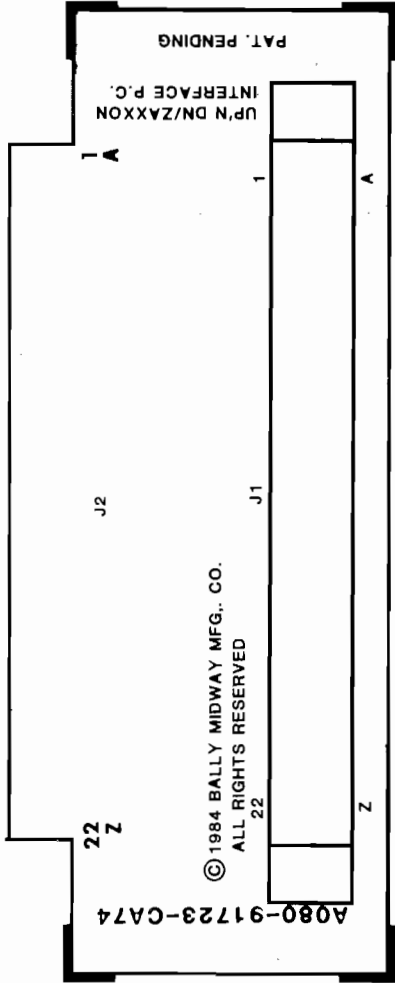

DESIGNATION LIST

DESIGNATION	DESCRIPTION
J1	DUAL 22 PIN EDGE CONN.

CROSS REFERENCE LIST

DESCRIPTION	QTY	DESIGNATION	PART NO.
DUAL 22 PIN EDGE CONN.	1	J1	0017-00021-0395

PROJECT ENG: J. SZERSZEN

THIS DWG. IS CONFIDENTIAL & PROPERTY OF BALLY/MIDWAY MFG. CO.

DIM. TOLERANCES
 UNLESS OTHERWISE SPEC.
 CONCENTRICITY T.I.R. .002
 FRACTIONAL ± 1/64
 DECIMAL ± .005
 HOLE DIA + .002 - .000
 ANGLE ± 1/2°
DO NOT SCALE DWG.

FIRST USED ON UP 'N DOWN
 DRN *M M* DATE 4/12/84 SCALE FULL
 MECH CHK MAT L
 ELEC CHK FINISH


Bally/MIDWAY MFG. CO.
 FRANKLIN PARK, IL 60131

UP 'N DOWN / ZAXXON INTERFACE
 ASSY DWG
 A080-91723-CA74

REVISIONS


PART NO.

MO 51 - 00A74 - C009.

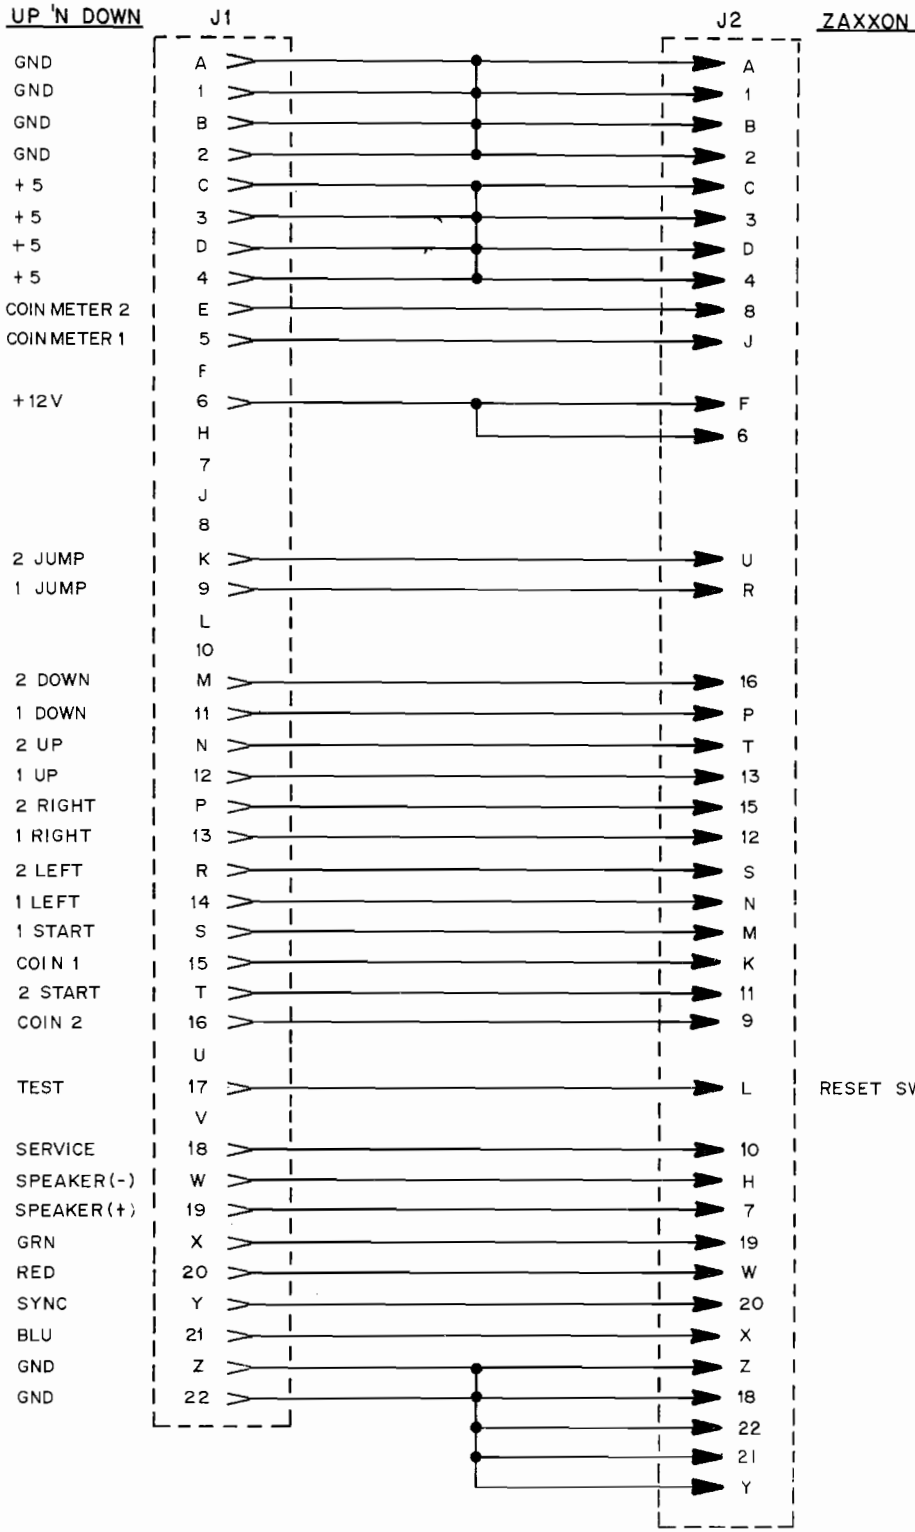

REVISIONS	


PROJECT ENG: J. SZERSZEN		USED ON UP 'N DOWN		Baby / MIDWAY MFG. CO. FRANKLIN PK ILL
DO NOT SCALE DWG.		HEAT TREAT	SCALE FULL	
DIM. TOLERANCES UNLESS SPECIFIED		DRN. <i>ted</i>	UP 'N DOWN/ZAXXON INTERFACE P.C.	
CONCENTRICITY TYP .001		MAT'L.	PART NO.	
FRACTIONAL .001		FINISH	MO51 - 00A74 - C010	
DECIMAL .005		DA 4/12/84	A080 - 91723 - CA74	
HOLE DIA. +.002 .000				

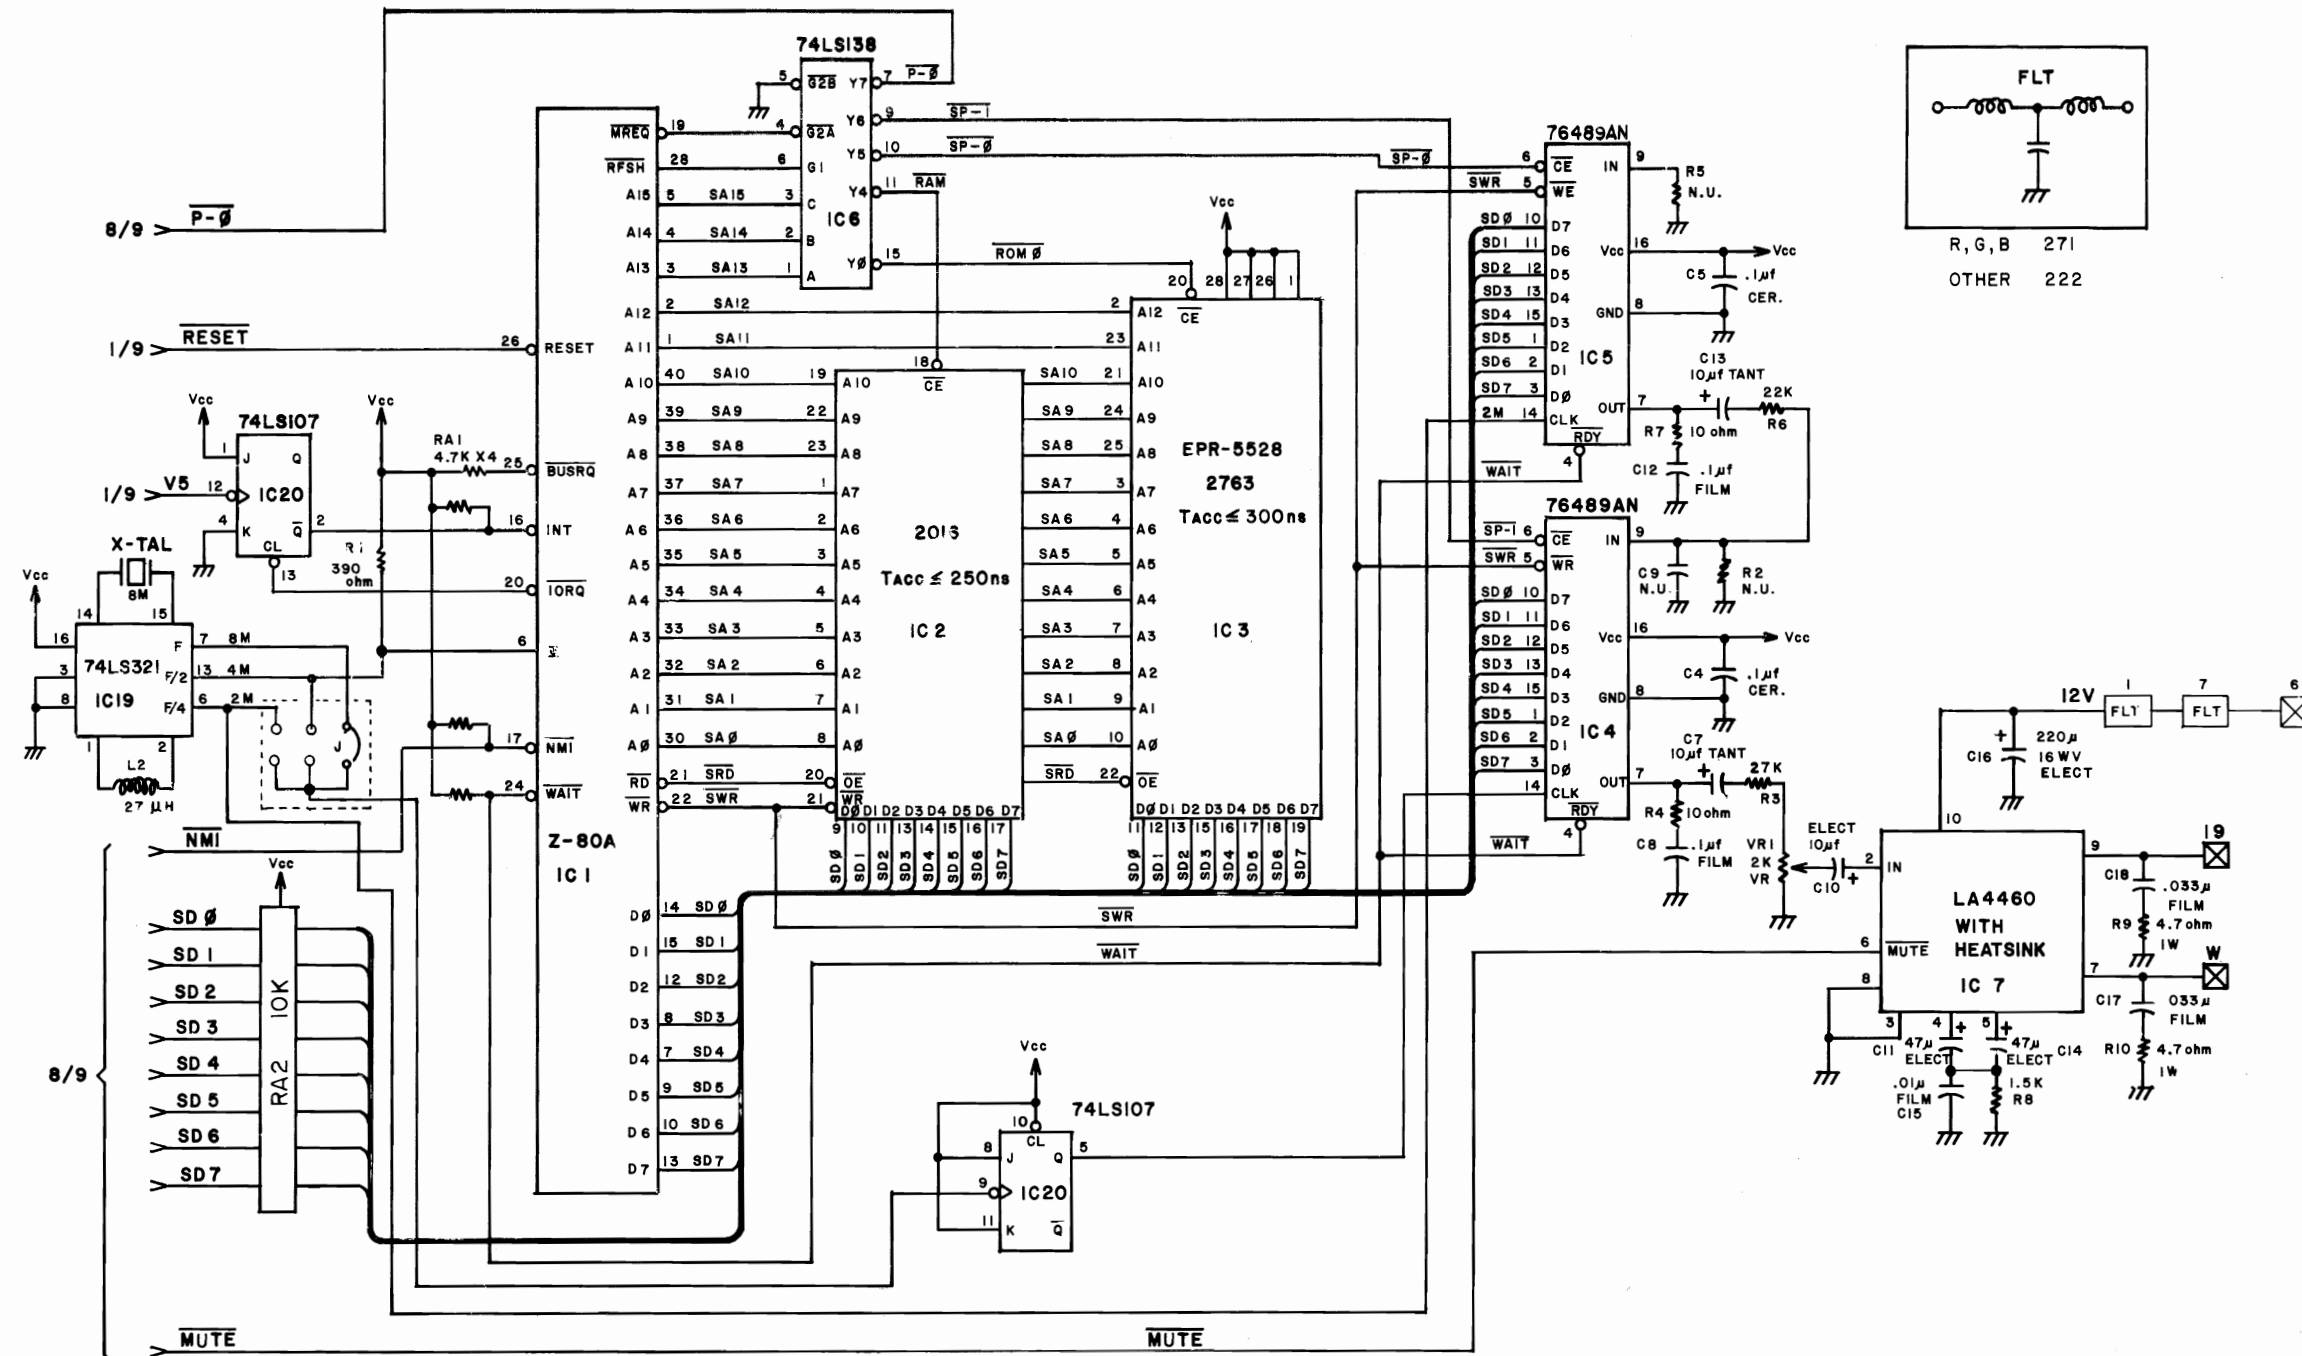

REVISIONS	

PROJECT ENG: J. SZERSZEN		USED ON UP'N DOWN		Bally / MIDWAY MFG. CO. FRANKLIN PK. ILL.	
DO NOT SCALE DWG.		HEAT TREAT	SCALE	NO. REQ'D	
DIM. TOLERANCES UNLESS SPECIFIED		DRN. C.L.	MAT'L.	SCHEMATIC DRAWING	
CONCENTRICITY TYP. .005		CKD.	FINISH	UP'N DOWN LOGIC P.C.	
FRACTIONAL 1/64		DATE 3/30/84		A080-91718-DA64 PAGE 9 OF 9	
DECIMAL .005				PART NO. M051 - 00A64 - D010	
HOLE DIA. +.002 .000					

ck

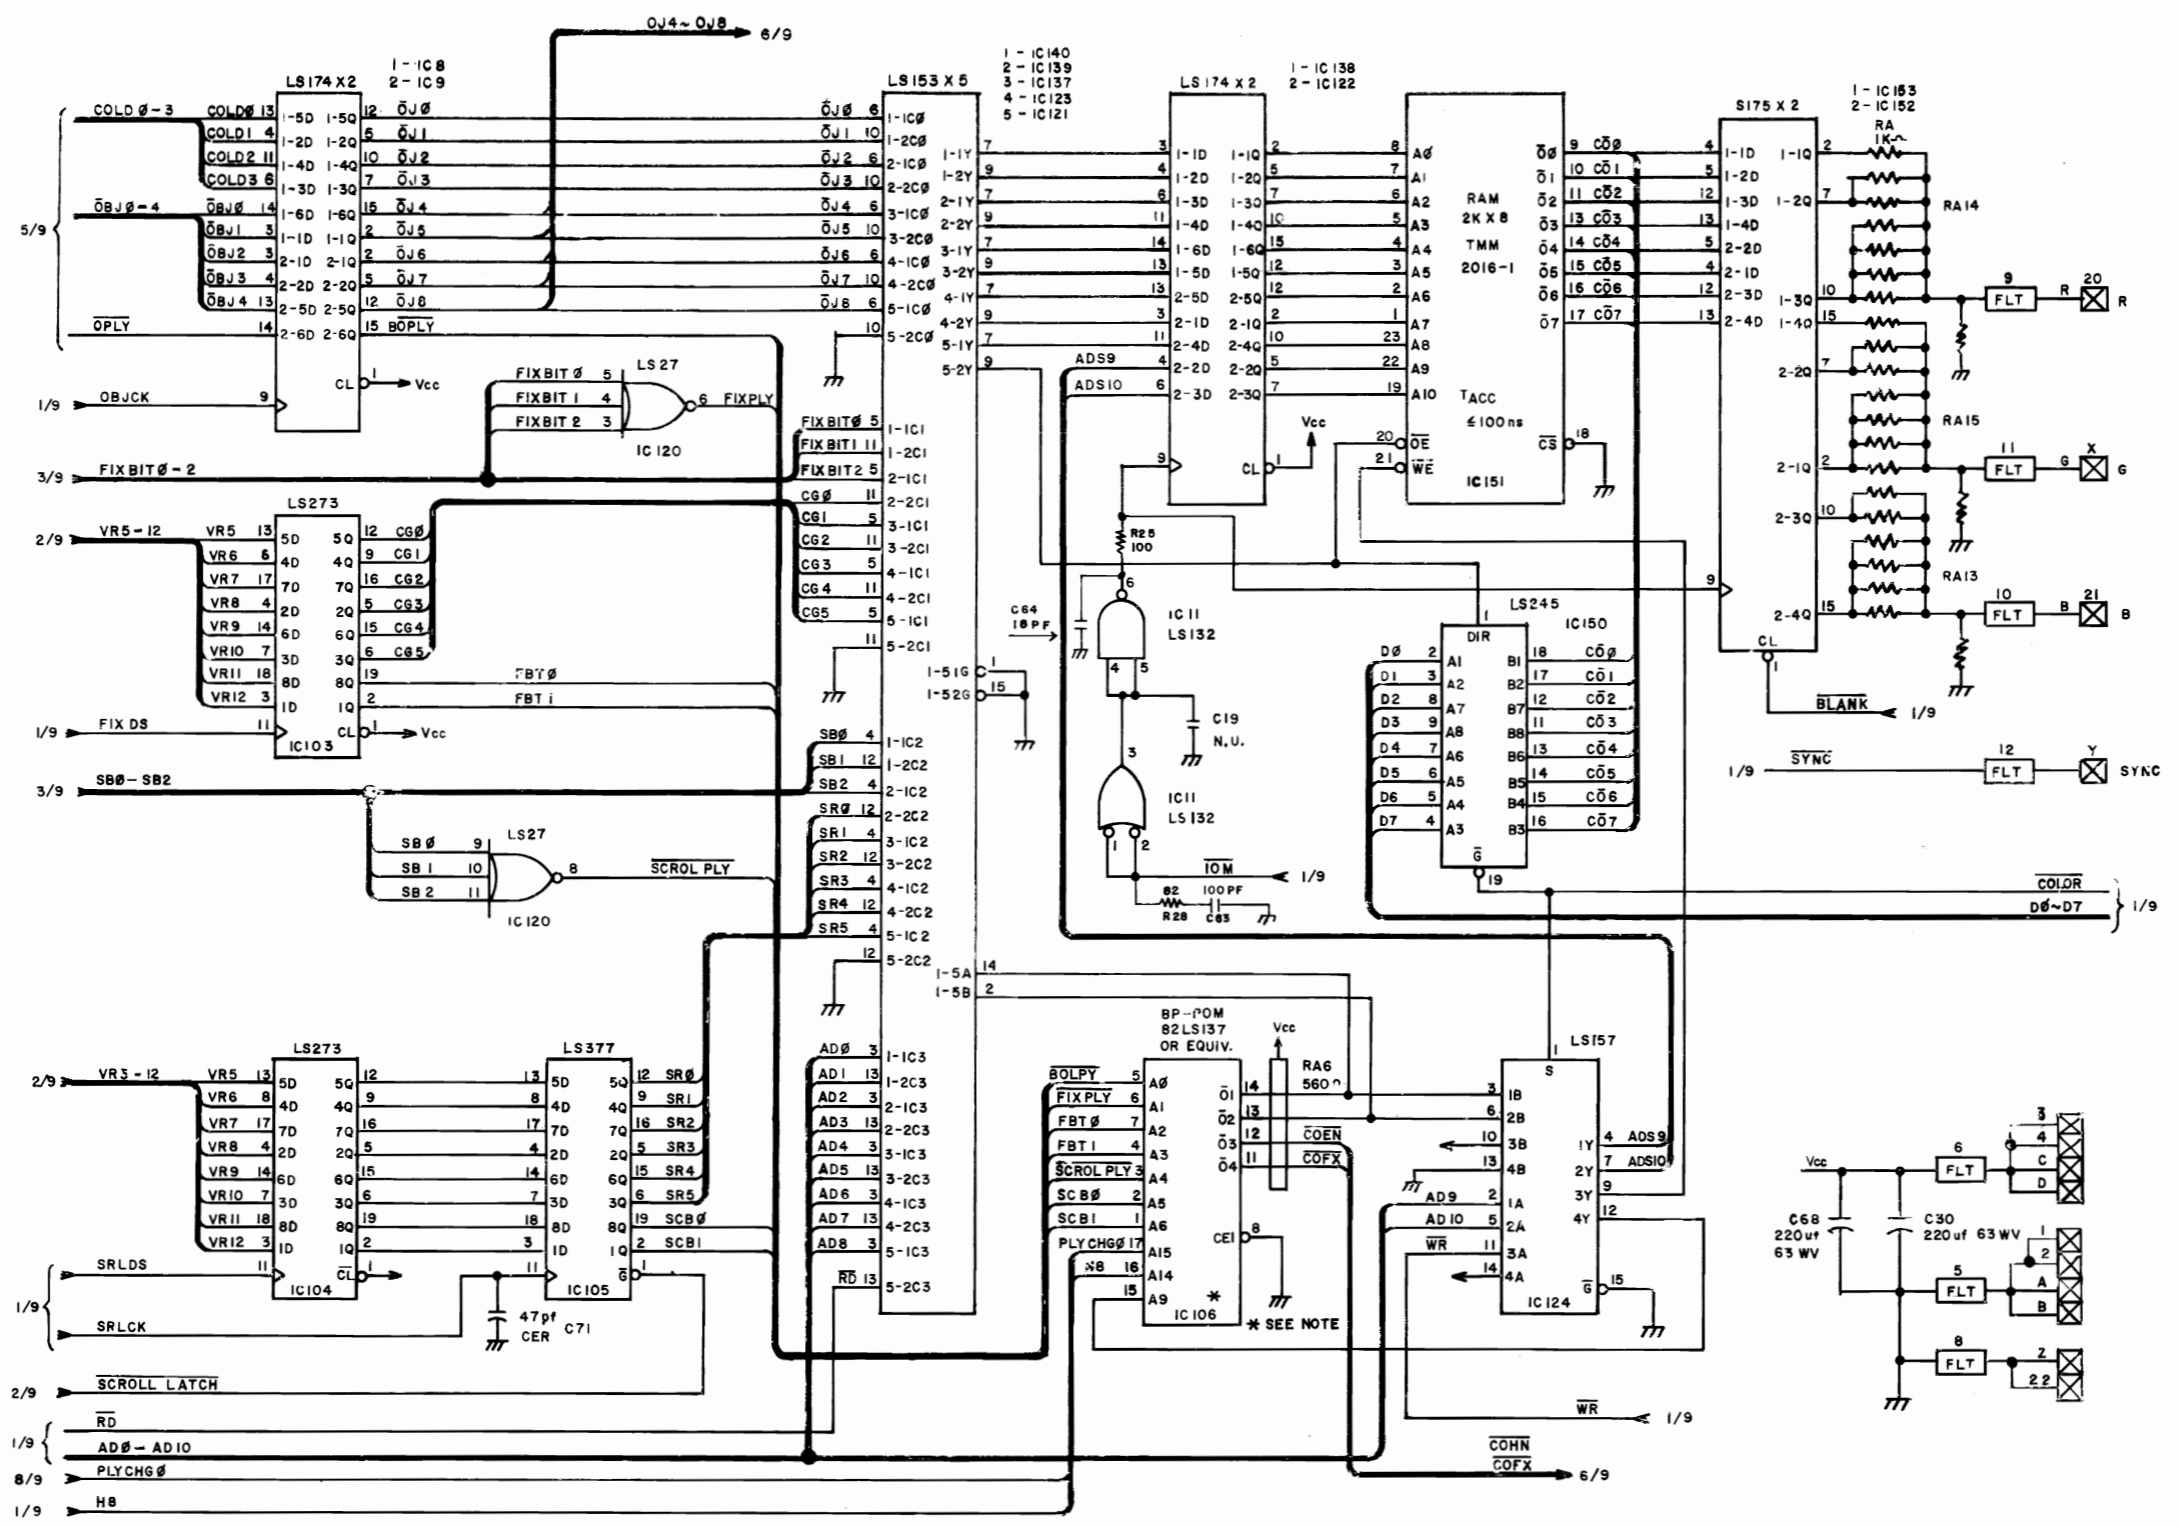


NOTE:
PIN #S FOR IC106 REFER TO PCB SILKSCREEN WHICH IS FOR AN 18 PIN CHIP.

REVISIONS	


PROJECT ENG: J. SZERSZEN		USED ON UP'N DOWN		 FRANKLIN PK. ILL.	
DO NOT SCALE DWG.		HEAT TREAT	SCALE		
DIM. TOLERANCES UNLESS SPECIFIED		DRN. <i>RLW</i>	MAT'L.	SCHEMATIC DWG. UP'N DOWN LOGIC P.C.	
CONCENTRICITY TYP 0.05		CKD.	FINISH	PART NO.	
FRACTIONAL 1/64		DATE 3/30/84		M051 - 00A64 - D010	
DECIMAL 0.05					
HOLE DIA +.002 0.00					

A080 - 91718 - DA64
PAGE 7 OF 9

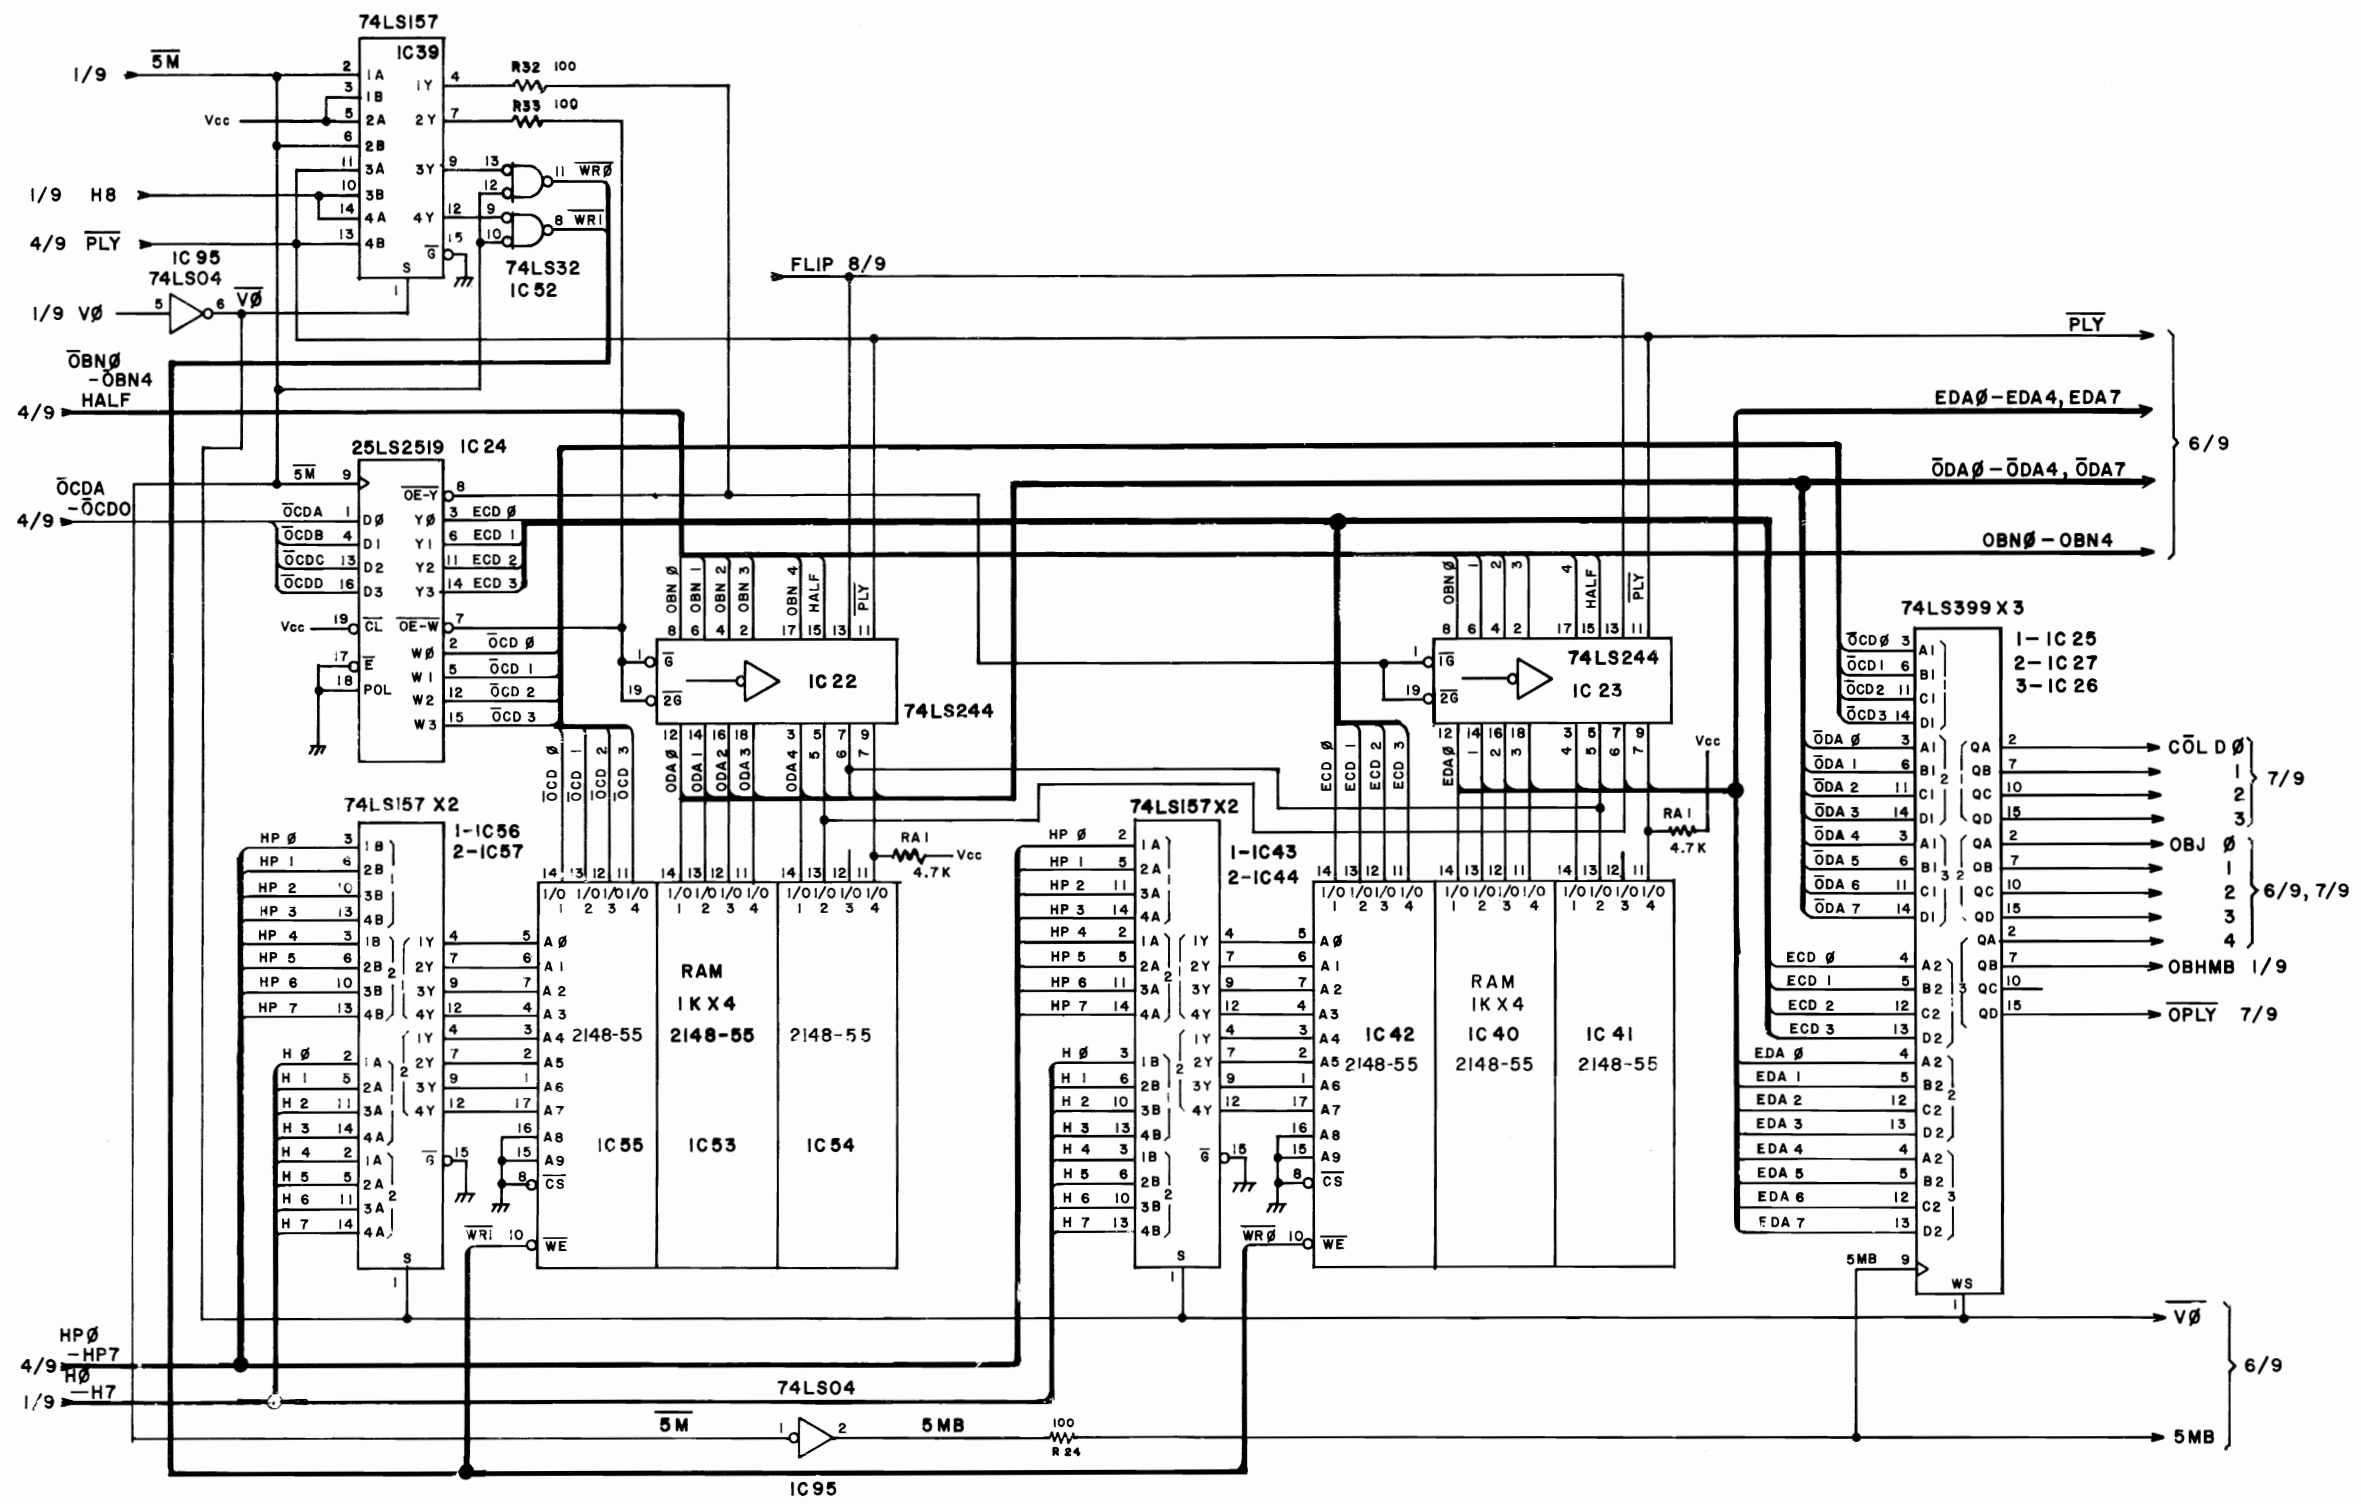


3-3084	ADDED R32 & R33	REV. D	RLW
REVISIONS			

PROJECT ENG: J. SZERZEN		USED ON UP'N DOWN		Bally / MIDWAY MFG. CO. FRANKLIN PK. ILL.	
DO NOT SCALE DWG		HEAT TREAT	SCALE		
DIM TOLERANCES UNLESS SPECIFIED		DRN. <i>CL</i>	MAT'L.	SCHEMATIC DRAWING UP N DOWN LOGIC P.C. A080-91718-DA64	
DATE 3/30/84		CKD.	FINISH		
		PAGE 5 OF 9			

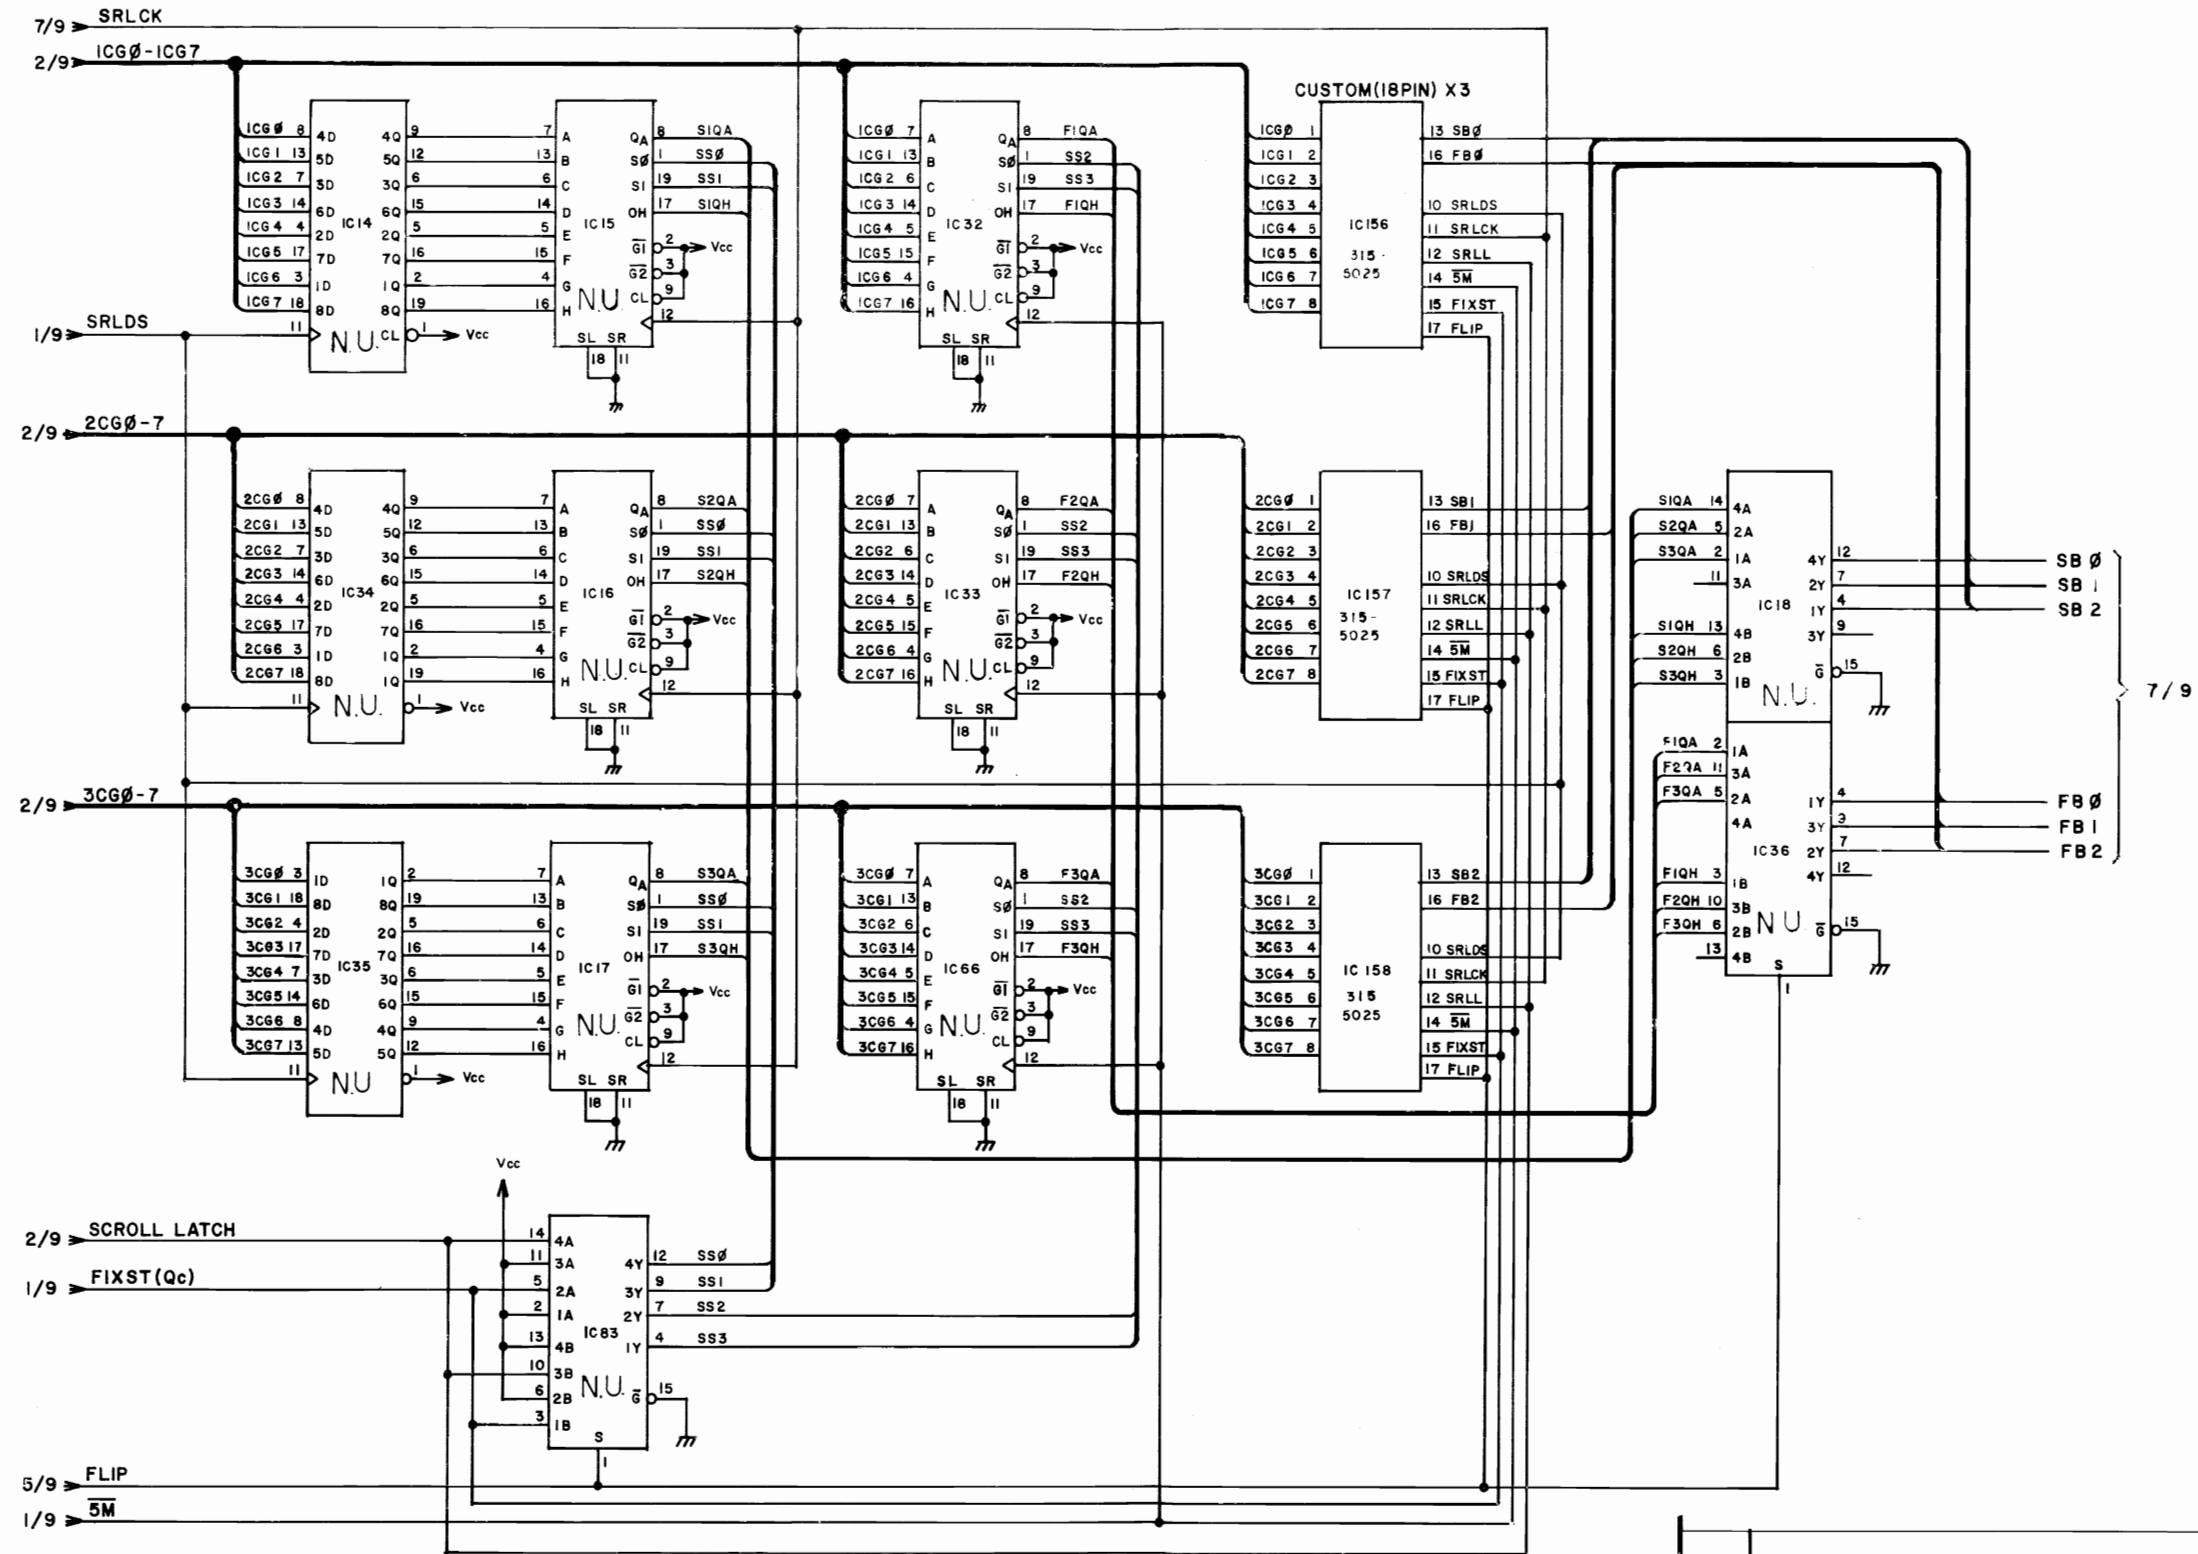

REVISIONS	


PROJECT ENG: J. SZERSZEN		USED ON UP'N DOWN		Bally / MIDWAY MFG. CO. FRANKLIN PK. ILL.
DO NOT SCALE DWG.		HEAT TREAT	SCALE	
DIM TOLERANCES UNLESS SPECIFIED		DRW. <i>RLW</i>	MAT'L.	PART NO. M051 - 00A64 - D010
LONGITUDINALITY TYP. 0.03		CD.	FINISH	
FRACTIONAL 1/64		DATE 3/30/84		SCHEMATIC DRAWING UP'N DOWN LOGIC P.C. A080 - 91718 - DA64 PAGE 3 OF 9
DECIMAL 0.005				
HOLE DIA +.002 .000				

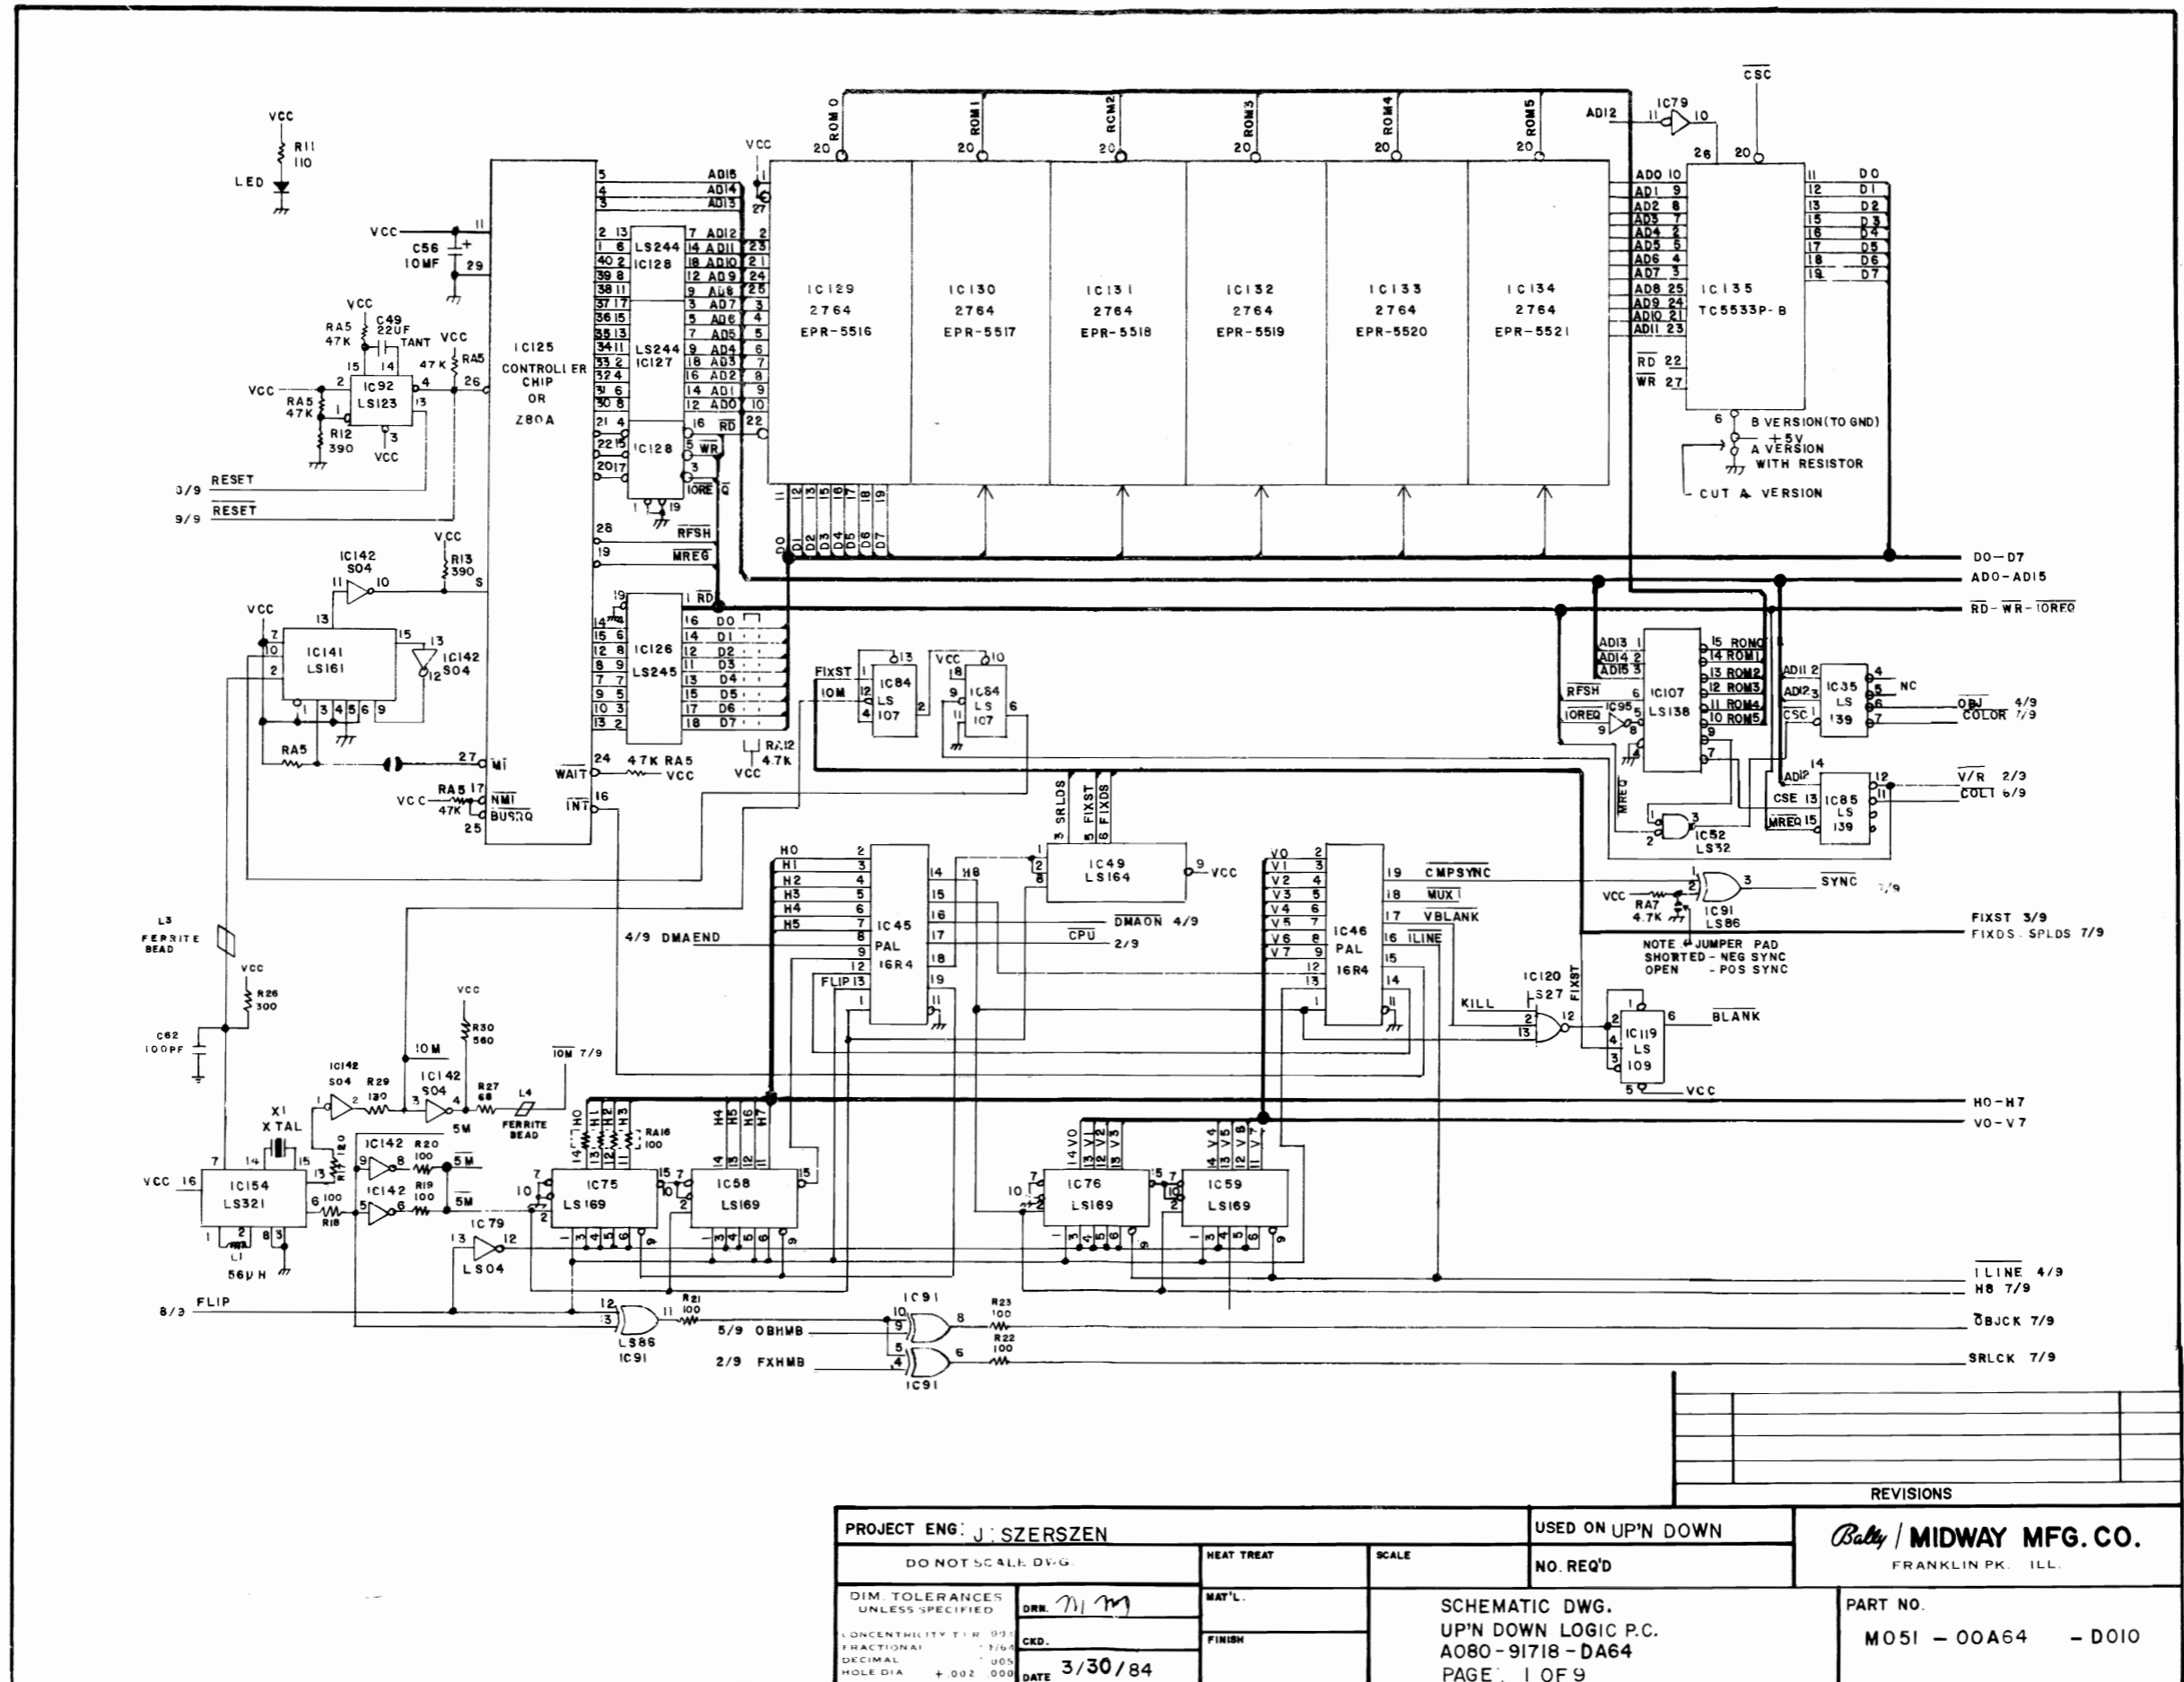

PROJECT ENG: J. SZERSZEN		USED ON UP'N DOWN		Bally / MIDWAY MFG. CO. FRANKLIN PK. ILL.	
DO NOT SCALE DWG.		HEAT TREAT	SCALE		
DIM. TOLERANCES UNLESS SPECIFIED		DRW. <i>JMS</i>	MAT'L.	SCHEMATIC DWG. UP'N DOWN LOGIC P.C. A080-91718-DA64 PAGE 1 OF 9	
CONCENTRICITY ± 0.03		CKD.	FINISH		
FRACTIONAL ± 1/64		DATE 3/30/84		M051 - 00A64 - D010	
DECIMAL ± 0.05					
HOLE DIA + 0.02 0.00					


REVISIONS

PROJECT ENG: J. SZERZEN		HEAT TREAT	SCALE	FULL	NO. REVD: 1 PER	FRANKLIN P.K. ILL.	
DO NOT SCALE DWG.				USED ON UPN DOWN		Baby / MIDWAY MFG. CO.	
DIM. TOLERANCES UNLESS SPECIFIED		MKT. L.		SCHEMATIC DWG. UPN DOWN LOGIC P.C.		PART NO.	
CONCENTRICITY TYP. 0.03		FINISH		A080-9178-DA64		M051-00A64 - D010	
FRACTIONAL DECIMAL		DATE		PAGE 2 OF 9			
HOLE DIA. ± 0.02-0.00		3/30/84					

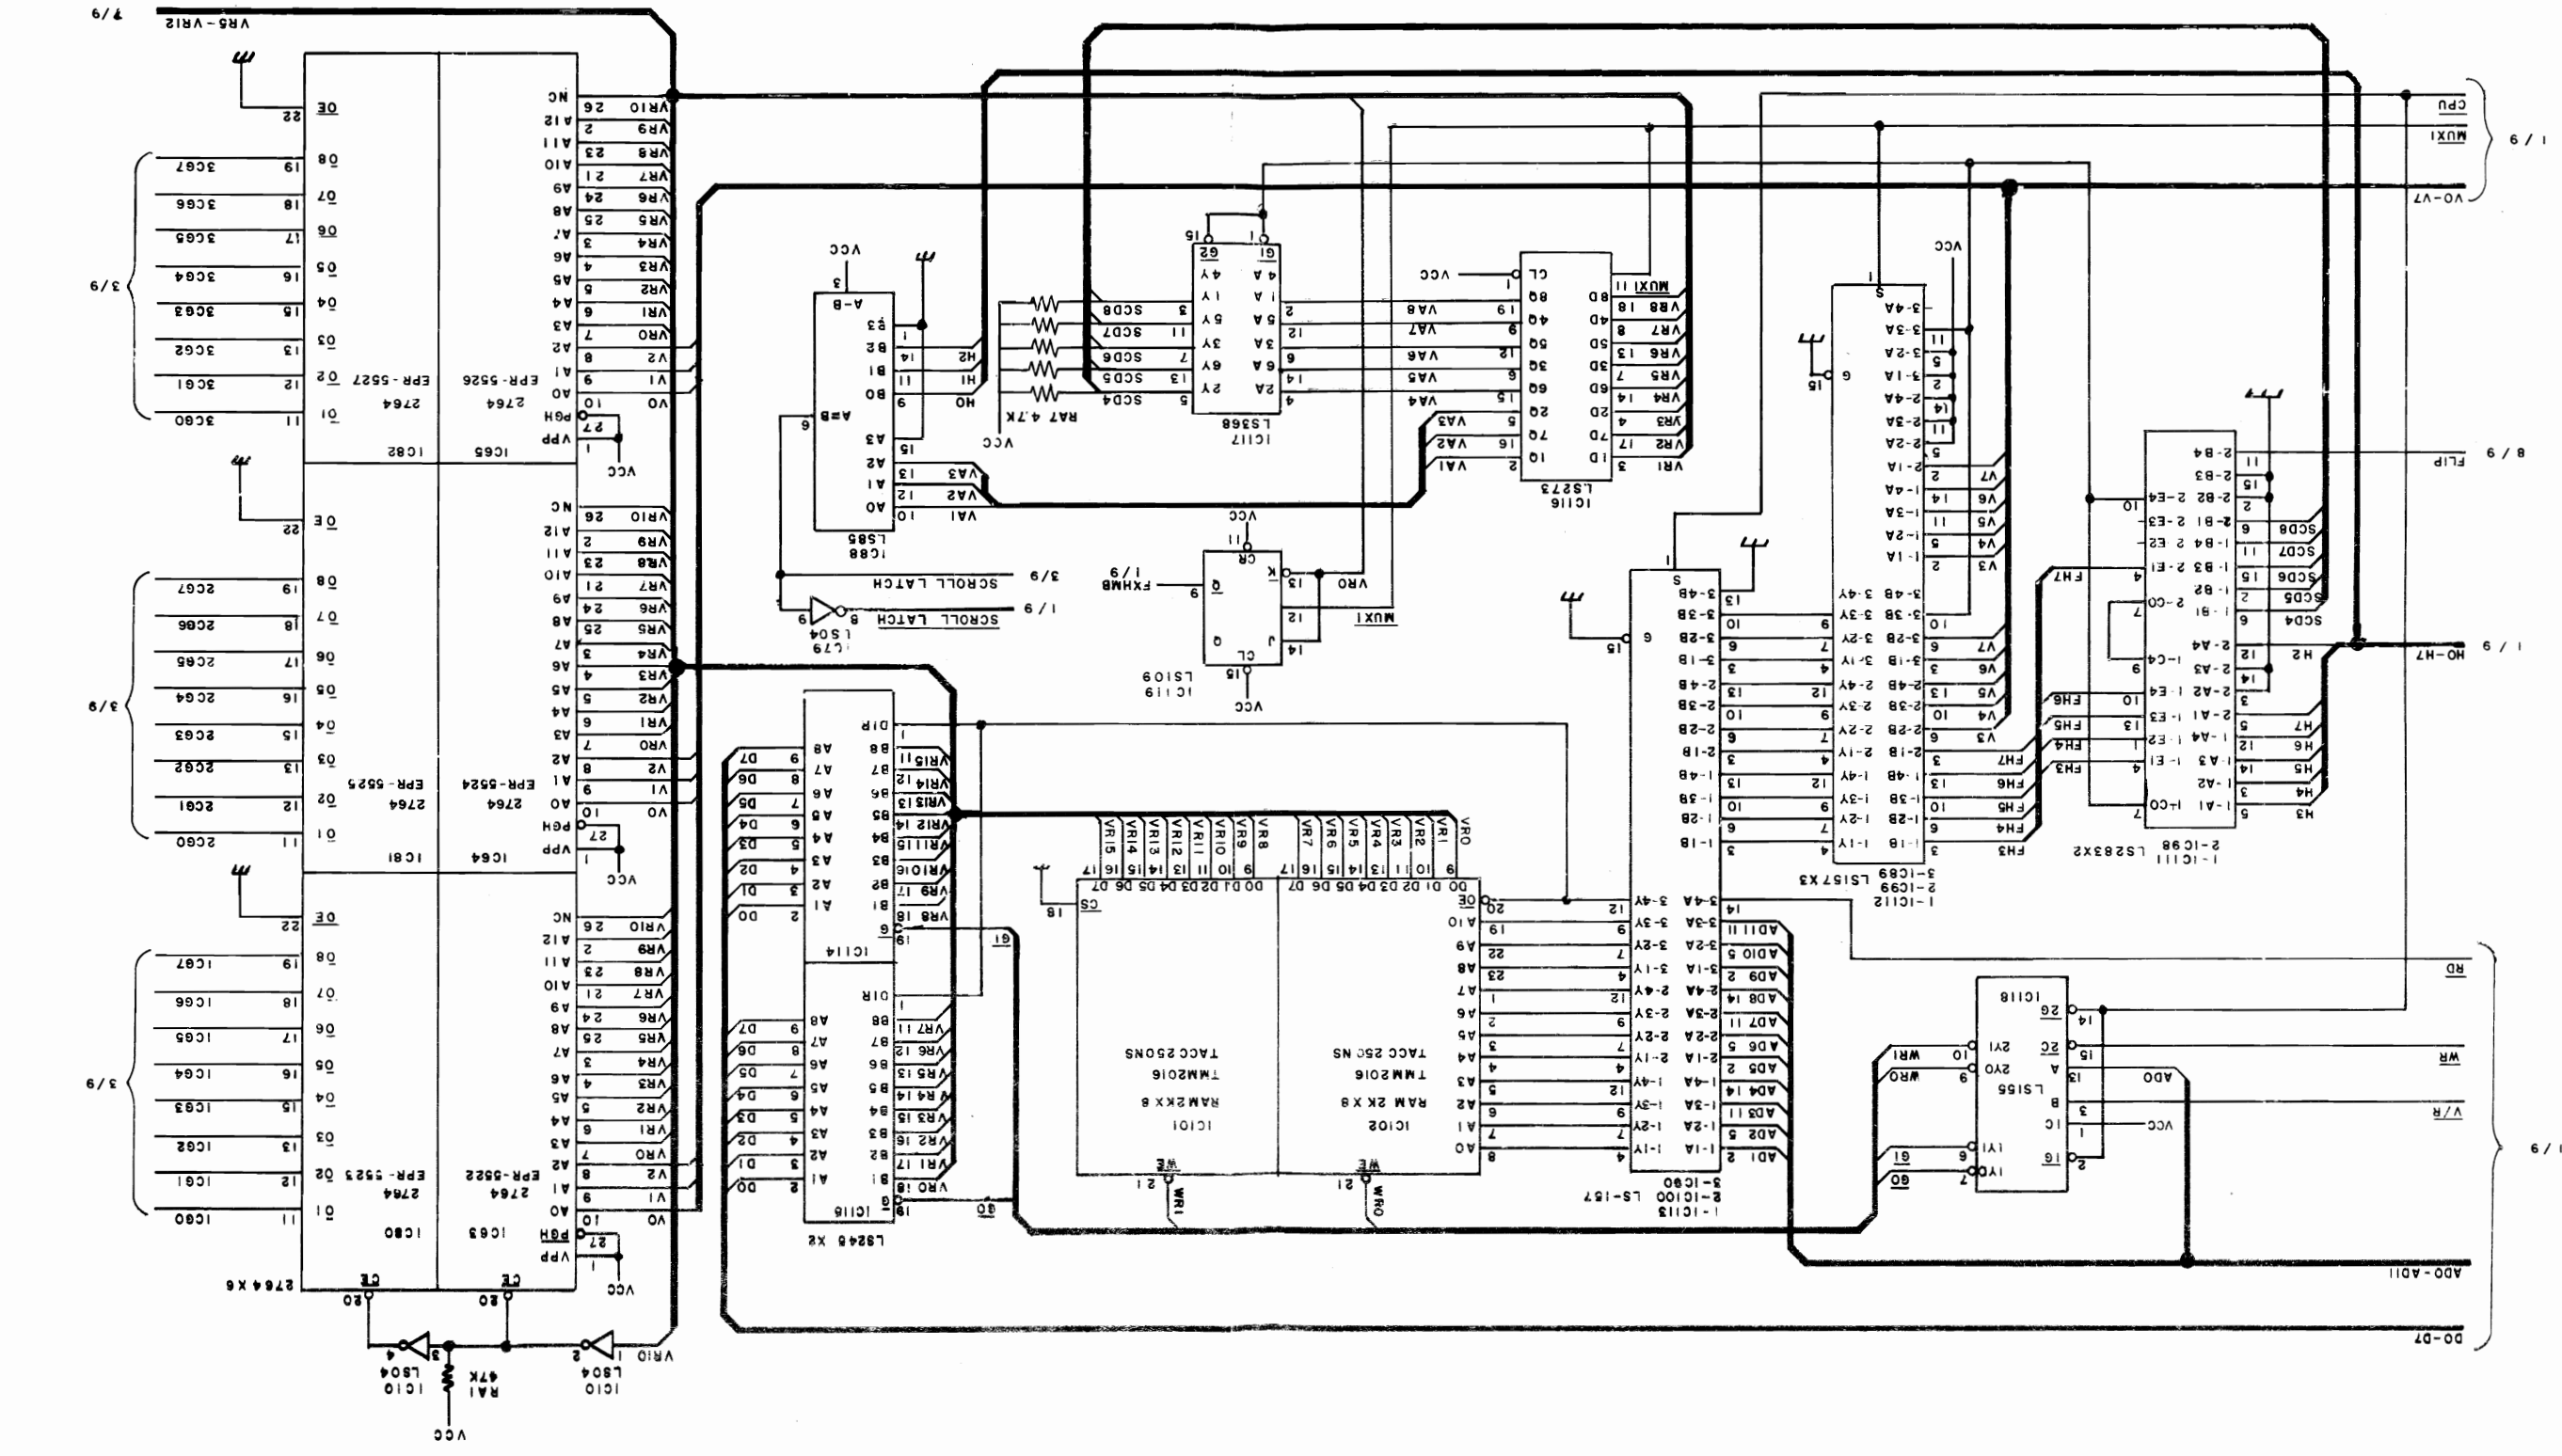


PROJECT ENG: J. SZERSZEN		HEAT TREAT	SCALE	NO. REVD: 1 PER	Midway MFG. CO. FRANKLIN PK. ILL.
DO NOT SCALE DWG.		USED ON UP & DOWN			
DIM. TOLERANCES UNLESS SPECIFIED		MAT'L.	PART NO.		
CONCENTRICITY ± 0.02		SCHEMATIC DWG. UP & DOWN LOGIC PC.			M051 - 00A64 - D010 PAGE 4 OF 9
FRACTIONAL DECIMAL ± 0.015		FINISH	A080-9178-DA64		
HOLE DIA. ± 0.02 ± 0.005		DATE	3/30/84		

REV	DESCRIPTION

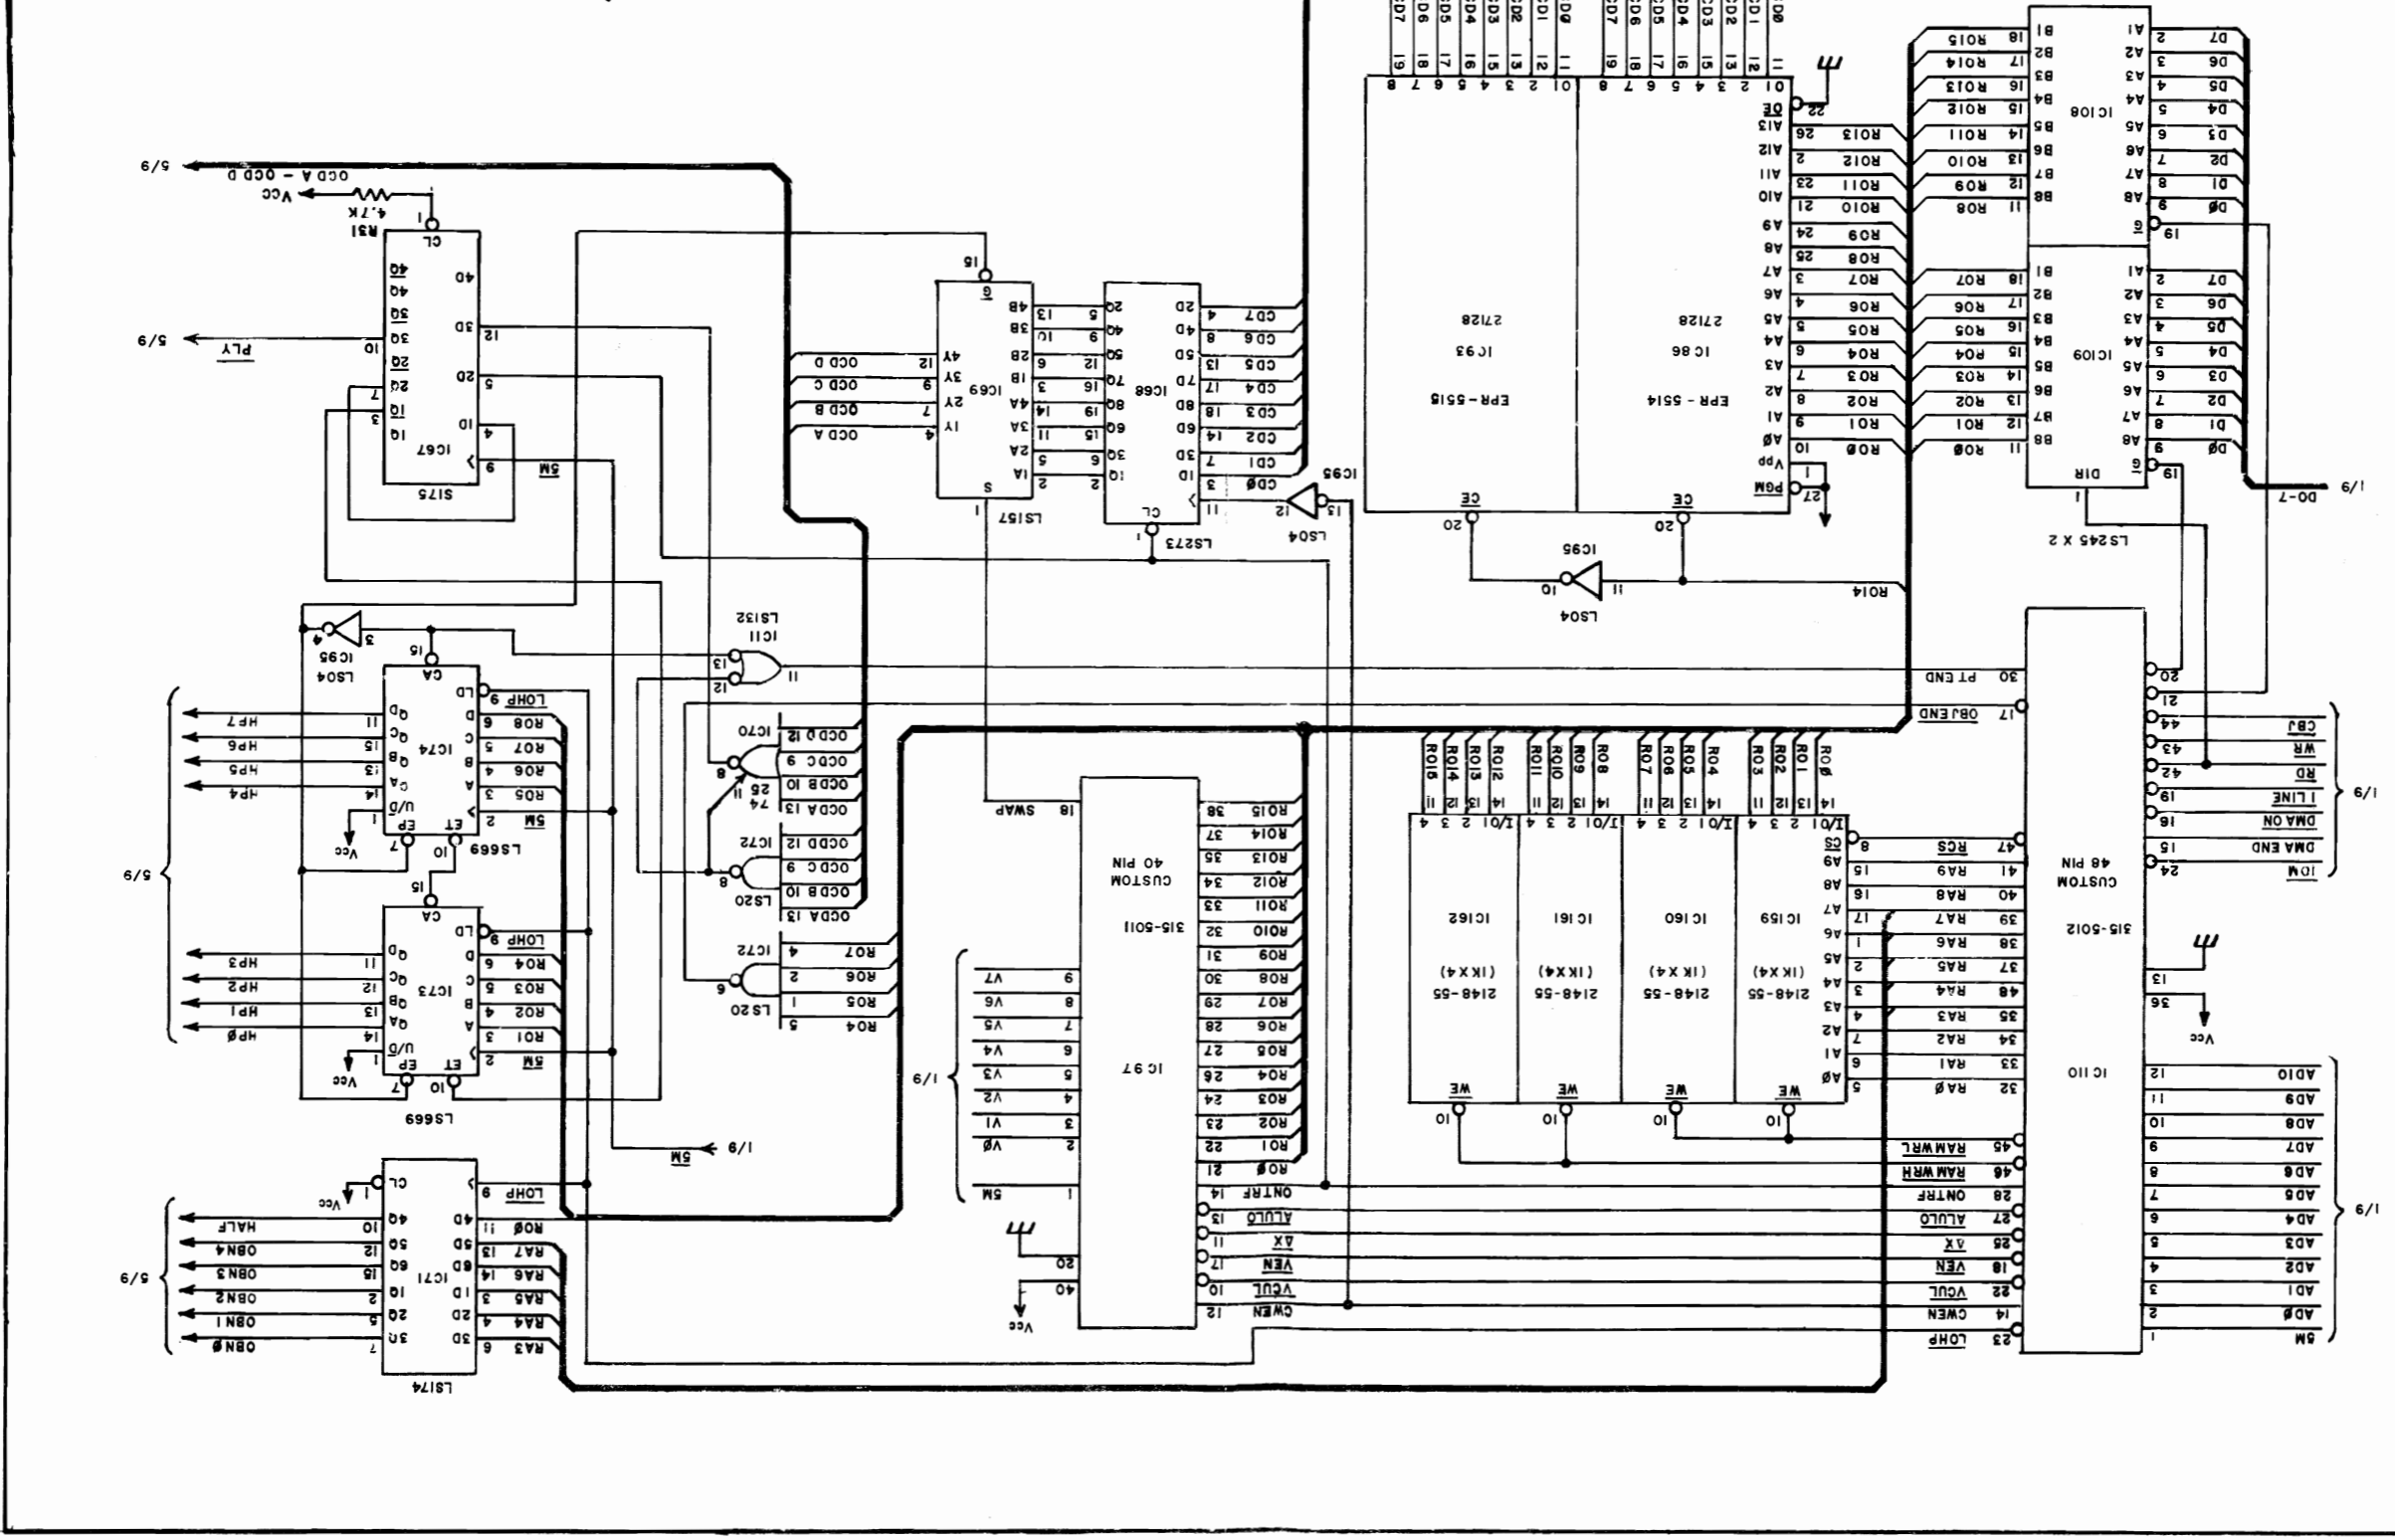

DIM. TOLERANCES UNLESS SPECIFIED CONCENTRICITY TYP. 0.03 FRACTIONAL DECIMAL 1/64 HOLE DIA. +0.02 -0.00		DATE 3/30/84 CKD. FINISH	UP'N DOWN LOGIC PC. SCHEMATIC A080-91718-DA64 PAGE 6 OF 9	PART NO. M051-00A64 - D010
PROJECT ENG: J. SZERZEN USED ON UP'N DOWN		HEAT TREAT SCALE FULL NO. RECD 1 PER	MIDWAY MFG. CO. FRANKLIN PK. ILL.	
DO NOT SCALE DWG.		MAT'L. BAK	REVISIONS	

NO.	DESCRIPTION

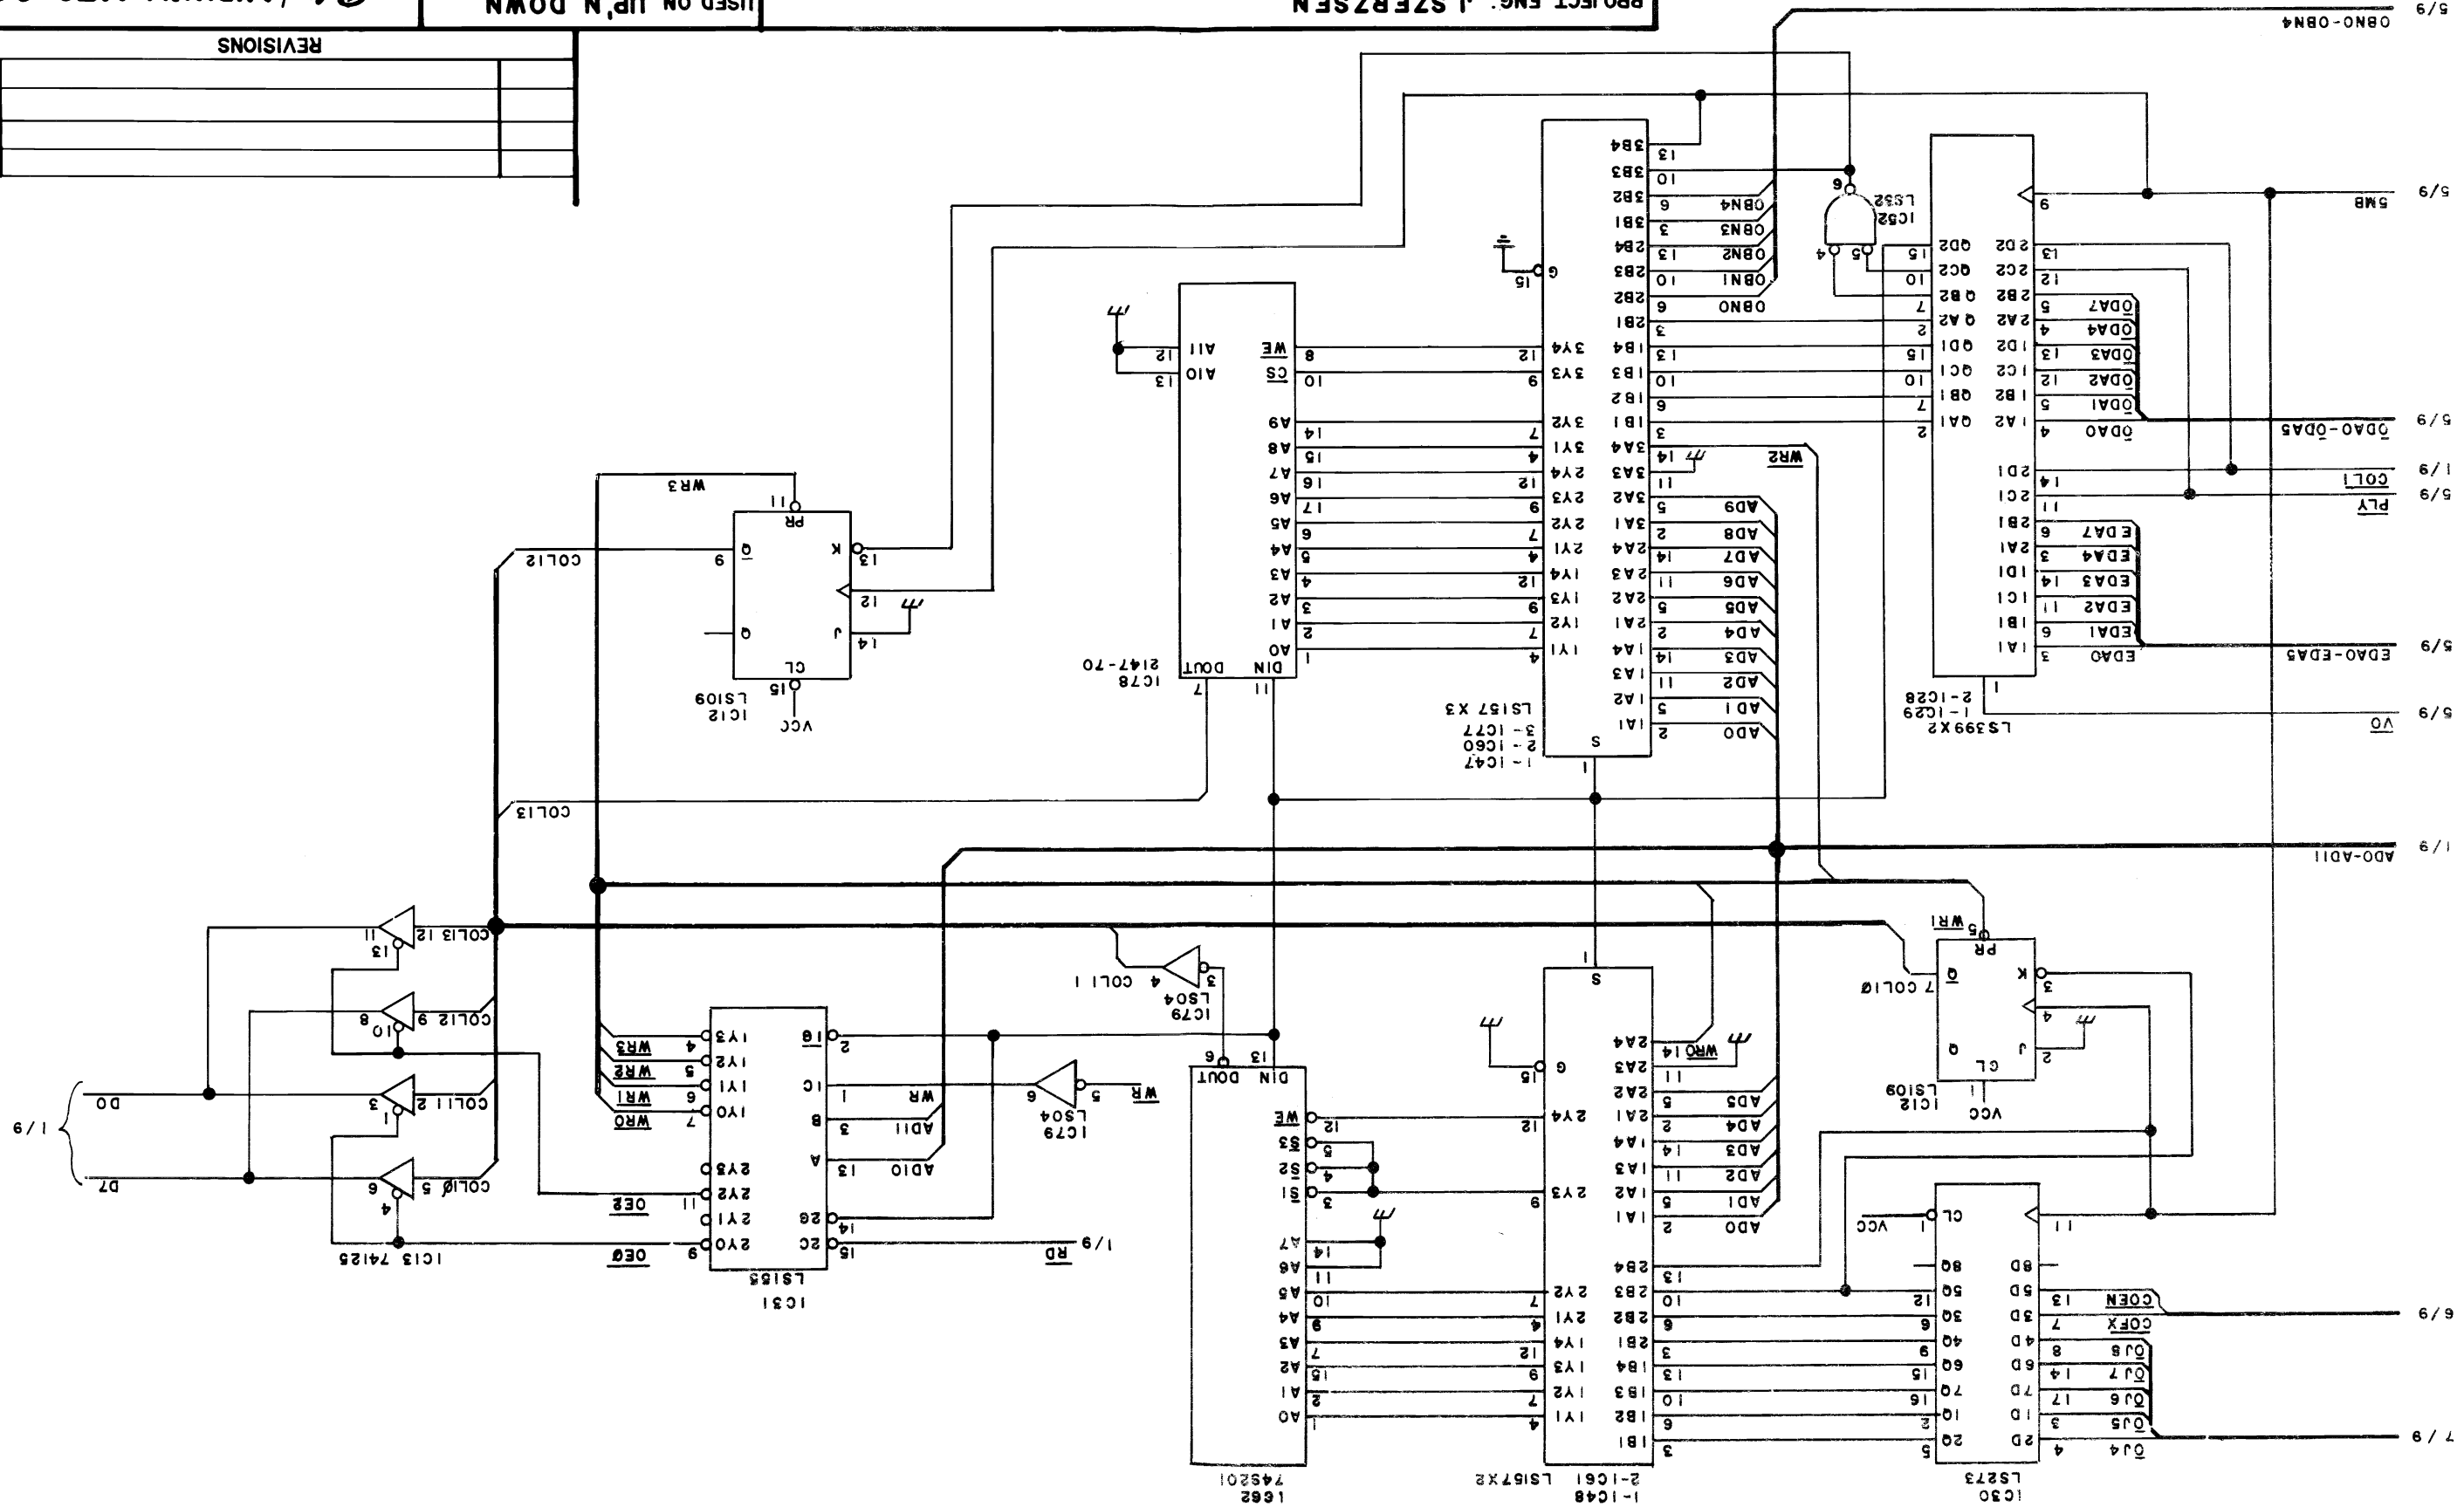

5/9 OBN0-OBN4

5/9 5MB

5/9 ODA0-ODAS

1/9 COL1

5/9 PLY

5/9 EDAS-EDAS

5/9 VO

1/9 ADO-AD11

6/9 COEN

6/9 COFX

7/9 OJ4

7/9 OJ5

7/9 OJ6

7/9 OJ7

7/9 OJ8

7/9 OJ9

