


MOS
LSI

TMS 2708 JL, TMS 27L08 AND TMS 2716 JL 8K AND 16K ERASABLE PROGRAMMABLE ROMs

- 2708 JL and 27L08 JL – 1024 X 8 Organization
- 2716 JL 2048 X 8 Organization
- All Inputs and Outputs Fully TTL-Compatible
- Static Operation (No Clocks, No Refresh)
- Maximum Access Time . . . 450 ns
- Minimum Cycle Time . . . 450 ns
- 3-State Outputs for OR-Ties
- N-Channel Silicon-Gate Technology
- 8-Bit Output for Use in Microprocessor-Based Systems
- Low Power
 - TMS 27L08 . . . 245 mW (Typical)
 - TMS 2716 . . . 315 mW (Typical)
- 10% Power Supply Tolerance (TMS 27L08 Only)
- Plug-Compatible Pin-Outs Allowing Interchangeability/Upgrade to 16K With Minimum Board Change

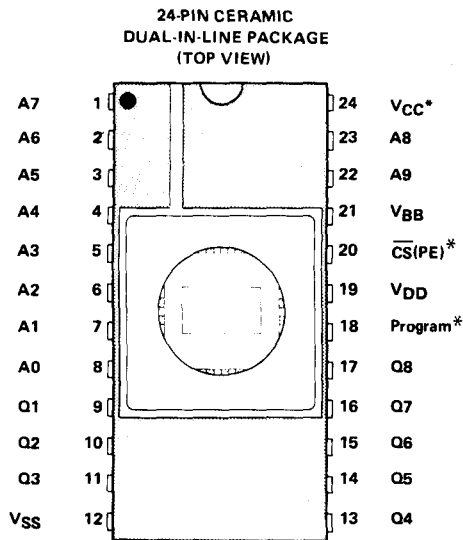

*For 2716 JL Only: Pin:
 18 CS (Program)
 20 A10
 24 VCC (PE)

V_{BB} -5V power supply
 V_{CC} +5V power supply
 V_{DD} +12V power supply
 V_{SS} 0V ground

TMS 2516 JL 16K ERASABLE PROGRAMMABLE READ-ONLY MEMORIES

- 2048 x 8 Organization
- Single +5 V Power Supply
- All Inputs and Outputs Fully TTL-Compatible
- Maximum Access Time . . . 450 ns
- Minimum Cycle Time . . . 450 ns
- 3-State Outputs for OR-Ties
- 8-Bit Output for Use in Microprocessor Based Systems
- N-Channel Silicon-Gate Technology
- Low Power: 525 mW Maximum Active Power
 132 mW Maximum Standby Power
- Guaranteed d.c. Noise Immunity with Standard TTL Loads – No Pull-Up Resistors Required
- Interchangeable with Intel 2716

