

Electronics Division
Box 1246 • 2271 Arbor Blvd.
Dayton, Ohio 45439
Telephone (513) 299-0990


## **Operating Instructions**

For Model

37.7A

DONKEY KONG

NINTENDO

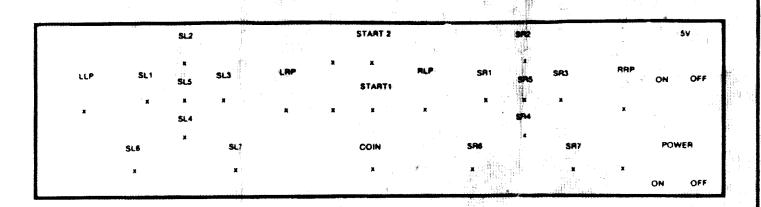

- 1. Insert 377A program card into "A" connector on TF-650 with number side up.
- 2. Connect 10-pin ribbon cable connector to VIDEO BOARD with RED DOT to pin 1 of P3.
- 3. Connect 9, 5, 4, 32, 17, 2 and 3 pin ribbon cable connectors to P9, P8, P10, P6, P5, P4 and P3 respectively on CPU BOARD. Also connect 6-pin ribbon cable RED connector to P7.
- 4. Connect speaker across short RED and BLACK leads on 377A card. AUDIO level control is on 377A card.
- Slide 5 VOLT switch to ON.
- 6. Slide POWER switch to ON.
- 7. Controls are:

COIN is CREDIT (coin counter LED is on 377A card.)

START 1 is 1 PLAYER START

START 2 is 2 PLAYER START

SR1 is LEFT

SR3 is RIGHT

SR2 is UP

SR4 is DOWN

SR5 is JUMP

- 8. TEST switch is on 377A card (if used)
- SR7 is SERVICE SWITCH.

MPU BOARD				
MARKING	LOCATION	TYPE	SIGNATURE	PERSONALITY BOARD
TKG4-C	3 <b>F</b>	2716	Н656	2716/124
TKG4-C	<b>3H</b>	2716	65 <b>A</b> 4	2716/I24·
TKG4-C	5A	TMS2532	F4P1	TMS2532/L24M
TKG4-C	5 <b>B</b>	TMS2532	8276	TMS2532/L24M
TKG4-C	5 <b>C</b>	TMS2532	P9C8	TMS2532/L24M
TKG4-C	5 <b>E</b>	TMS2532	9C74	TMS2532/L24M
VIDEO BOAR	D.			
				2716 (****
TKG4-V	3N	2716	2931	2716/124
TKG4-U	<b>3</b> P	2716	U735	2716/I24
TKG4+V	7C	2716	1 AUP	2716/124
TK <b>G4</b> -V	7D	2716	2000	2716/124
TKG4-V	7E	2716	732C	2716/I24
TKG4-V	7F	2716	A1A5	2716/124