


Electronics Division
Box 1246 • 2271 Arbor Blad
Dayton, Ohio 45433
Telephone (513) 299-(390)

Operung Institutions

MALLY

MEDWAY

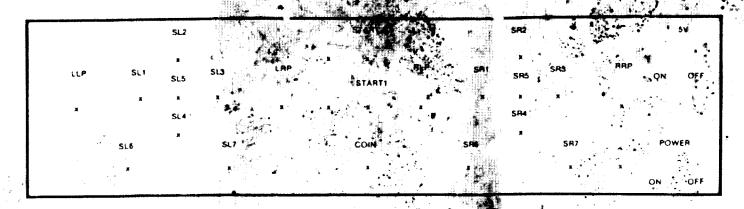

- 1. Insert 346A program card into "A" connector on If 650, number side up.
- 2. Connect 22/44 pin connector to GAME BOARD with RED DOT UP.
- 3. Connect speaker across two 6 inch leads located on 22/44 pin connector.
- 4. Slide 5-VOLT switch to CN.
- 5. Slide POWER switch to ON.
- 6. SL6 is RESET.
- 7. CREDIT IS COIN switch, Coin Counter (CC) LED on 346A card.

START 1 is F PLAYER SELECT

START 2 is 2 PLAYER SELECT

SR1 is 1st PLAYER LEFT
SR2 is 1st PLAYER UP
SR3 is 1st PLAYER RIGHT
SR4 is 1st PLAYER DOWN
SR5 is 1st PLAYER SMOKE
SL3 is 2nd PLAYER RIGHT
SL4 is 2nd PLAYER DOWN
SR5 is 1st PLAYER SMOKE
SL5 is 2nd PLAYER SMOKE

- 8. SL7 is CREDIT SWITCH.
- 9. UPRIGHT (U) and COCKTAIL (C) switch is located on 346A card.

ROM TEST SIGNATURES

		*			
18	52U8	(M24) *	4 N	H4P9	(D16)
1E	3FḤ1 .	(M24)	NIT	8123	(D16)
1H	2100	(M24	7K.	3HP4	(D16)
1K	AF76	(M24)	8 M•	·' 65 Ų 5	(A16)
2M	∰90P7	(A16).	- ₹ 8P	oft/fit	$(A16)_{\perp}$
3P	78A2	(A16 ***	(8E)	3F52	$(M24)^{-1}$