

Models JAN-200
JAO-200

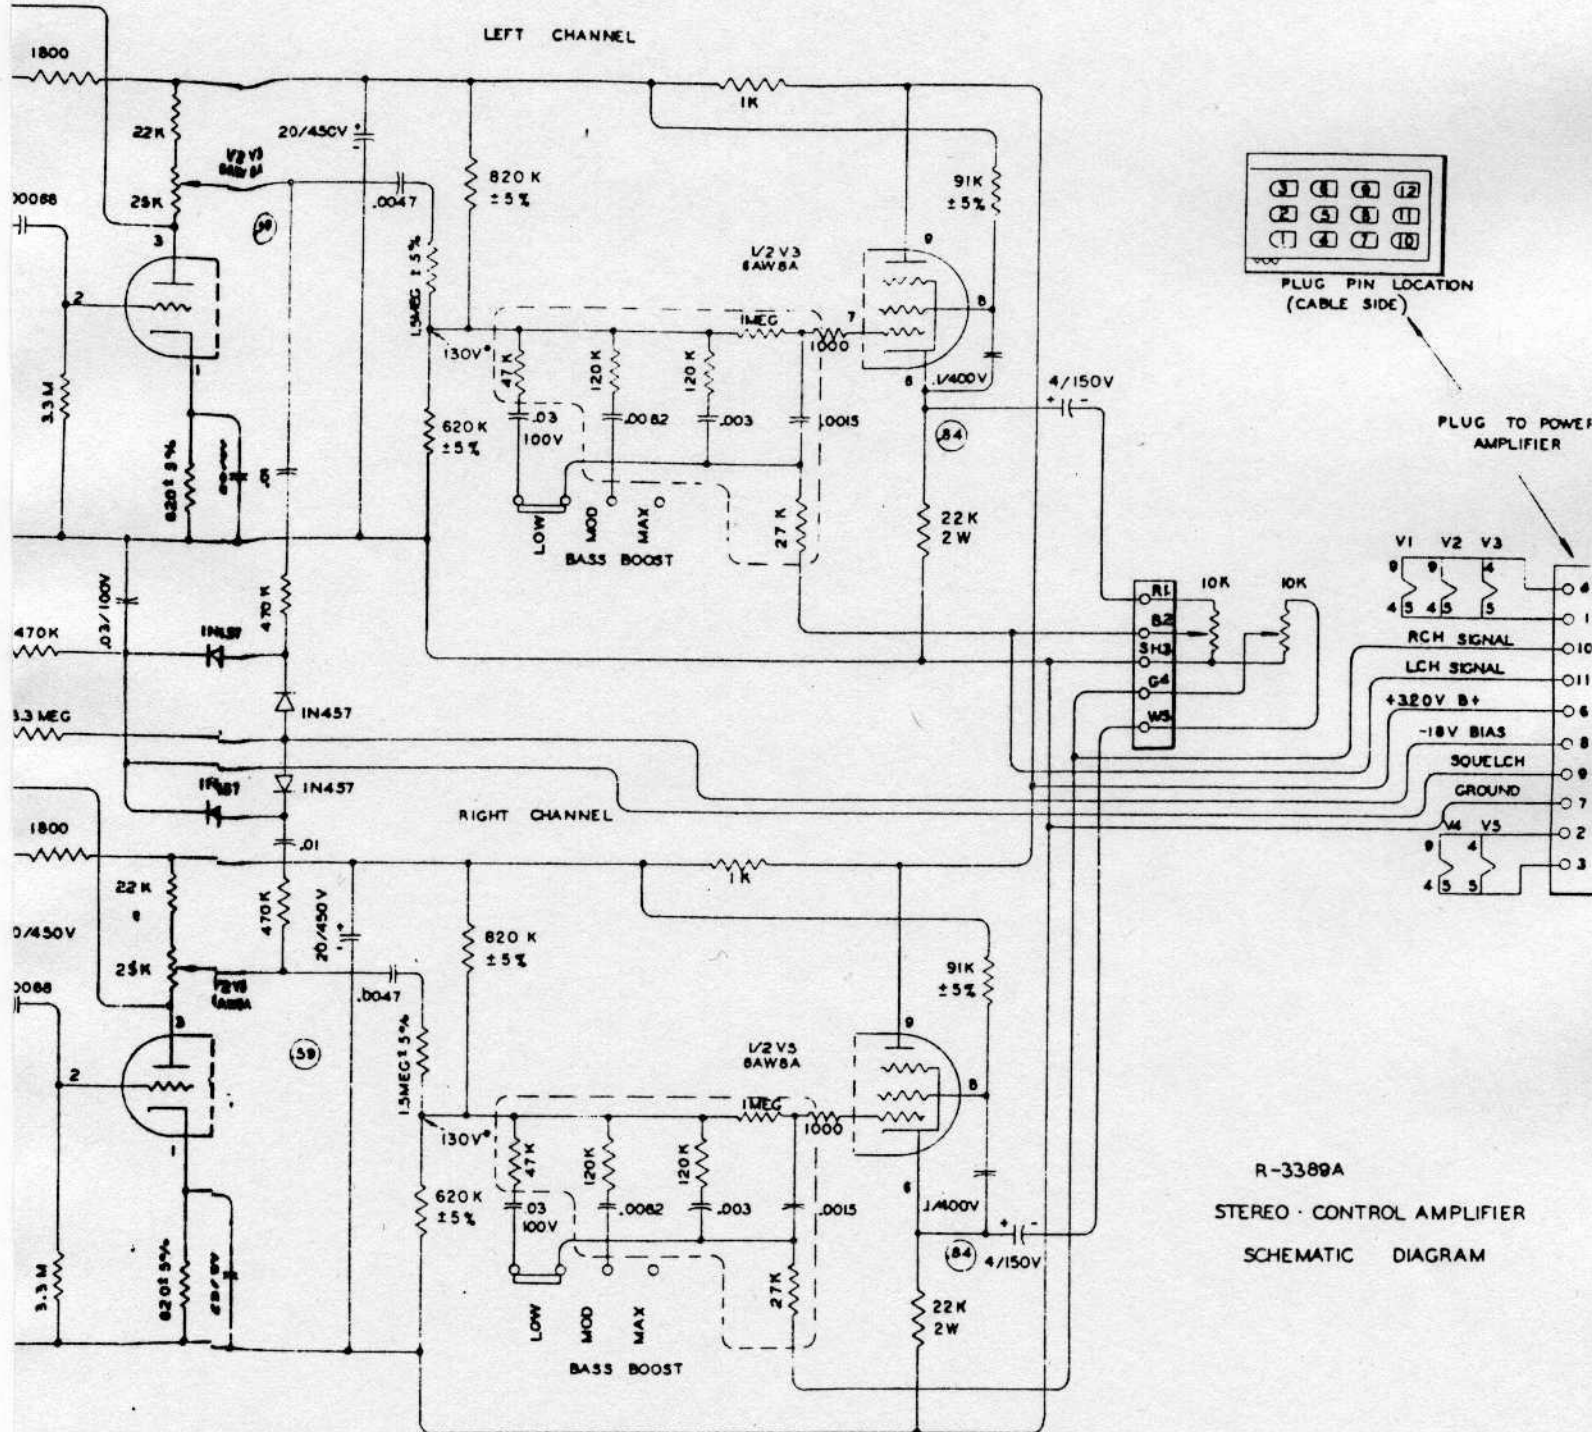


CHART C

PIN 4	PIN 5	PIN 8	PIN 7	PIN 8	PIN 8
		135	148	0	
		180	191	0	
		135	181	210	320
		180	204	0	

NOTE :

CAPACITOR RATINGS ARE 500V. MIN. UNLESS OTHERWISE SPECIFIED
CAPACITOR VALUES ARE IN MFD UNLESS OTHERWISE SPECIFIED
D.C. VOLTAGES ARE MEASURED TO CHASSIS WITH A 20,000 OHMS
PER VOLTMETER, NO INPUT SIGNAL
A.C. SIGNAL VOLTAGE READINGS ARE ENCIRCLED AND MEASURED TO
CHASSIS WITH AN A.C. V.T.V.M.
THE SIGNAL FREQUENCY IS 1 KC, VOLUME CONTROL AT MAX. TREBLE
RANGE CONTROL AT FULL & BASS BOOST AT MOD.
ALL RESISTORS ARE 1/2 WATT UNLESS OTHERWISE SPECIFIED.

R-3389A
STEREO CONTROL AMPLIFIER
SCHEMATIC DIAGRAM