

OPERATOR'S MANUAL

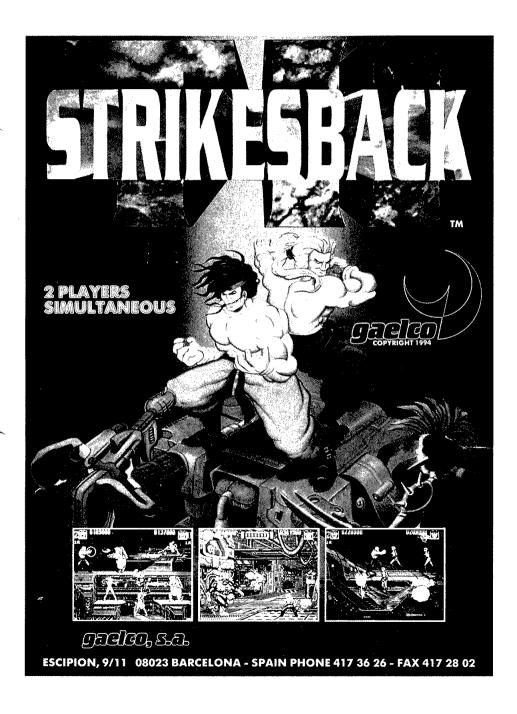


PCB CONECTOR JAMMA

SOLDER SIDE			COMPONENTS SIDE				
GND	Α	1	GND				
GND	В	2	GND				
+ 5V	С	3	+ 5V				
+ 5V	D	4	+ 5V				
N.C.	Ε	5	N.C.				
+ 12V	F	6	+ 12V				
	Н	7	al and a second				
COIN COUNTER 2	J	8	COIN COUNTER 1				
(COIN LOCK OUT 2)	ĸ	9	(COIN LOCK OUT1)				
SPEAKER (-)	L	10	SPEAKER (+)				
N.C.	М	11	N.C.				
VIDEO GREEN	N	12	VIDEO RED				
VIDEO SYNC	Р	13	VIDEO BLUE				
SERVICE SW	R	14	VIDEO GND				
N.C.	s	15	TEST SW				
COIN 2	Т	16	COIN 1				
2P START	U	17	1P START				
2P UP	V	18	1P UP				
2P DOWN	w	19	1P DOWN				
2P LEFT	Х	20	1P LEFT				
2P RIGHT	Υ	21	1P RIGHT				
2P SHOT	Z	22	1P SHOT				
2P JUMP	а	23	1P JUMP				
2P SUPER SHOT	b	24	1P SUPER SHOT-				
N. C.	С	25	N. C.				
N. C.	d	26	N. C.				
GND	е	27	GND				
GND	f	28	GND				

CONTROL PANEL



MONITOR	HORIZONTAL
GAME STYLE	1 PLAYER o 2 PLAYERS SIMULTANEOUS



COIN / CREDIT OPTION SWITCH SETTING

DIP SW 1

OPTION		S1	S2	S3	S4	S5	S6	S7	S8
	1 COIN 1 CREDIT						OFF	OFF	OFF
С	2 COINS 1 CREDIT						OFF	OFF	ON
0	3 COINS 1 CREDIT						OFF	ON	OFF
	4 COINS 1 CREDIT						OFF	ON	ON
N	5 COINS 1 CREDIT						ON	OFF	OFF
	6 COINS 1 CREDIT						ON	OFF	ON
1	3 COINS 2 CREDITS						ON	ON	OFF
	4 COINS 3 CREDITS						ON	ON	ON
-	1 COIN 1 CREDIT			OFF	OFF	OFF			
, C	1 COIN 2 CREDITS			OFF	OFF	ON			
0	1 COIN 3 CREDITS			OFF	ON	OFF			
	1 COIN 4 CREDITS			OFF	ON	ON			
N	1 COIN 5 CREDITS			ON	OFF	OFF			
	1 COIN 6 CREDITS			ON	OFF	ON			
2	2 COINS 3 CREDITS			ON	ON	OFF			
	3 COINS 4 CREDITS			ON	ON	ON			
	START 1 CR./CONT. 1 CR.		OFF			-			
	START 2 CR./CONT. 1 CR.		ON						
	FREE PLAY	OFF							
	YE	S ON							

OPTION SWITCH SETTING

DIP SW 2

OPTIO	N	S1	S2	S3	S4	S5	S6	S7	S8
	1 NORMAL					~		OFF	OFF
GAME	2 EASY							OFF	ON
DIFICULTY	3 HARD							ON	OFF
	4 HARDEST							ON	ON
NOT US	ED						OFF		
NUMBER	2				OFF	OFF			
OF	3				OFF	ON			
	4				ON	OFF			
LIVES	1	- 3-			ON	ON			
ADVERTISE	YES			OFF					
SOUND	NO			ON					
NOT USI	ED		OFF						
TEST	NO	OFF							
, 201	YES	ON						OFF ON ON	