

EFFECT: ZAXXON

NUMBER: 009 8/9/82

Due to the configuration changes resulting from the introduction of an improved Power Supply (please refer to Service Notes 007, and 008), Top Assembly Numbers 700-0087-05 through -12 should be added to your ZAXXON™ Owner's Manual (P/N 420-0724) as follows:

On page 31, Item No. 72, delete the "2" following "Component Shelf Assy".


On page 32, 'cut and paste' or add by hand the following addendum;

 Top Assembly Numbers 700-0087 -05 through -12 are identical to -00 through -04, EXCEPT FOR Monitor and Component Shelf Assy type, as shown here:

TOP ASSEMBLY		DRAWING NUMBERS 700-0087 -05 through -12						DESCRIPTION				
ITEM NO.	PART NO.	QTY.	REQ'D.									
				-05	-06	-07	-08	-09	-10	-11	-12	
75.	800-0362	1	--	1	--	1	1	--	--			Mon assy vert MT ZAXXON
76.	800-0363	--	1	--	1	--	--	1	1			Mon assy nanao ZAXXON
83.	800-3243-02	--	--	1	1	1	--	1	--			Assy Component Shelf
84.	800-3243-03	1	1	--	--	--	1	--	1			Assy Component Shelf

 On page 33, Section A - A, ITEMS 75 and 76, make a note to refer to page 32.

On page 34, correct the Section B - B drawing as follows:

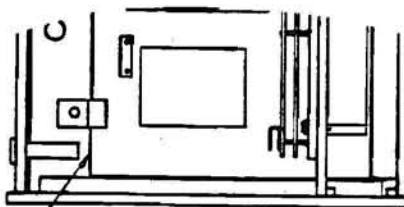

SECTION B - B

- ⑦② FOR -03 & -04 ASSY. ALSO FOR -07 & -08 ASSY
- ⑦③ FOR -00, -01 & -02 ASSY. ALSO FOR -05 & -06 ASSY
- ⑦③ FOR -09 & -10 ASSY
- ⑦④ FOR -11 & -12 ASSY

5V-6A SWITCHING REGULATOR

DRAWING NUMBER 601-0770

<u>ITEM NO.</u>	<u>PART NO.</u>	<u>QTY. REQ'D</u>	<u>DESCRIPTION</u>	<u>REF. DES.</u>
26	152-0159	1	CAP 4700 PF 50V-F	C9
27	152-0085	2	CAP 0.01 MF 50V-F	C101, 107
28	150-0148	2	CAP 1000 MF 10V-E	C102, 103
29	152-0154	1	CAP 0.01 MF 630V-F	C104
30	150-0009	2	CAP 1 MF 50V-E	C105, 106
31	152-0160	1	CAP 0.047 MF 50V-F	C108
32	152-0157	3	CAP 2200 PF 630V-F	C201, 301, 401
33	150-0162	1	CAP 220 MF 35V-E	C202
34	150-0106	1	CAP 47 MF 50V-E	C203
35	152-0161	3	CAP 1000 PF 200V-F	C204, 304, 404
36	152-0079	3	CAP 0.022 MF 50V-F	C205, 305, 405
37	150-0190	1	CAP 100 MF 35V-E	C302
38	150-0006	2	CAP 10 MF 50V-E	C303, 403
39	150-0228	1	CAP 330 MF 16V-E	C402
40	481-0242	1	DIODE S4VB60	D1
41	481-0238	2	DIODE ERB43-06	D2, 3
42	481-0120	1	DIODE MA161	D4
43	481-0239	1	DIODE ESAC83-004	D101
44	481-0243	3	DIODE CTU-22S	D201, 301, 401
45	313-0125	1	IC TL431CP	1C101
46	313-0197	1	IC SI-3122P	1C201
47	313-0130	1	IC AN7812	1C301
48	313-0131	1	IC AN7805	1C401
49	370-0007	1	PHOTO COUP. ON3105	PC2
50	482-0299	1	XISTOR ZSC2833A	Q1

5V-6A SWITCHING REGULATOR

DRAWING NUMBER 601-0770

<u>ITEM NO.</u>	<u>PART NO.</u>	<u>QTY. REQ'D</u>	<u>DESCRIPTION</u>	<u>REF. DES.</u>
51	482-0177	1	XISTOR 2SC1685	Q3
52	482-0076	1	XISTOR 2SA564A	Q4
53	180-0036	1	CHOKE TLP6505-2P	L1
54	180-0037	1	CHOKE ETB-30KH29X	L101
55	180-0038	3	CHOKE ELQ-050D08	L201, 301, 401
56	180-0039	1	CHOKE ELQ-35KH36X	L202
57	560-0114	1	XFMR ETB-39AK6X	T1
58	560-0115	1	XFMR ETB-12KA10X	T2
59	560-0116	1	XFMR ETB-19KA2X	T3
60	280-0477	1	TERMINAL STRIP	TB1
61	514-0011	1	FUSE 3A, 125V SLOW	F1

